



Revision 2

May 2021

LD-9 Weight Assisted Chin Up/Dip



Serial Number Here

Date of Purchase



Instructions

Congratulations on the purchase of your new Batca LD-9 Weight Assisted Chin Up/Dip machine. This gym will provide you with a lifetime of enjoyment to meet your strength training needs. Batca Fitness Systems strives to build the best quality gyms and to package these gyms in such a way to avoid any damage during shipping.

In order to get started with your assembly you should first familiarize yourself with this manual. It is recommended that you read through each step thoroughly before you begin. Begin by opening your boxes and separating all of your parts. Verify that all parts are accounted for and have no damage. When all parts are accounted for, you may begin your assembly. Some items may have been pre-assembled for your convenience. Please note that hardware quantities shown reflect total quantities for your gym and may not reflect actual quantities in each bag. Assemble your gym on a solid level surface. This will ensure the best possible performance, function, and safety for the gym and your workout.

Assemble your gym according to the step by step instructions found in this manual. Failure to do so will void your warranty and may result in personal injury. After assembly, you should check each station to ensure correct operation. If a problem arises, recheck your assembly with these instructions to verify correct assembly. If you are unable to correct a problem or have questions with your assembly please contact your authorized Batca dealer.

Warning

Batca Fitness Systems has built this gym to give you a safe, effective and enjoyable workout. However, there is a risk assumed by individuals who use this type of equipment. It is very important that all warnings and instructions are read and followed before beginning any exercise program.

It is also very important to read and follow the preventative maintenance schedule described in this manual. If any of the warning labels or stickers are worn, faded, torn, scratched or missing they should be replaced immediately.

WARNING: There is a risk assumed by individuals who use this type of equipment. To minimize risk always follow these rules.

- 1) It is essential that you consult with your physician before beginning any exercise program.
- 2) Inspect equipment before each use for loose, worn, or frayed parts (including cables, nuts and bolts). Replace parts at first signs of wear (use only genuine BATCA replacement parts). Use of equipment that is damaged, worn, frayed or not completely assembled on a solid, level surface may result in injury.
- 3) Make sure all adjustment pins are fully engaged before using equipment.
- 4) Keep all parts of the body and clothing outside the path of any moving parts of the gym. Be alert to the possibility of injury. Do not be careless.
- 5) Minors and children should not be allowed to play on or around this gym.
- 6) If you have any questions on proper use or maintenance of this gym, do not hesitate to call your local BATCA FITNESS SYSTEMS distributor or BATCA FITNESS SYSTEMS at (919) 255-1233. www.batcafitness.com

Table of Contents


	Page		Page
Instructions	2	Final Assembly and Troubleshooting	13
Parts Listing	3-4	Cable Tension and Adjustments	14
Main Assembly	5-10	Maintenance	15
Cable Routing	11	Warranty	16
Upholstery	12	Floor Plan Layout	17

Tools Required


- 9/16" Wrench/Ratchet
- Metric Allen Wrench Set (M8, M6, M4)
- 3/4" Wrench
- Tape Measure

Hardware Blister Pack


STEP 1:

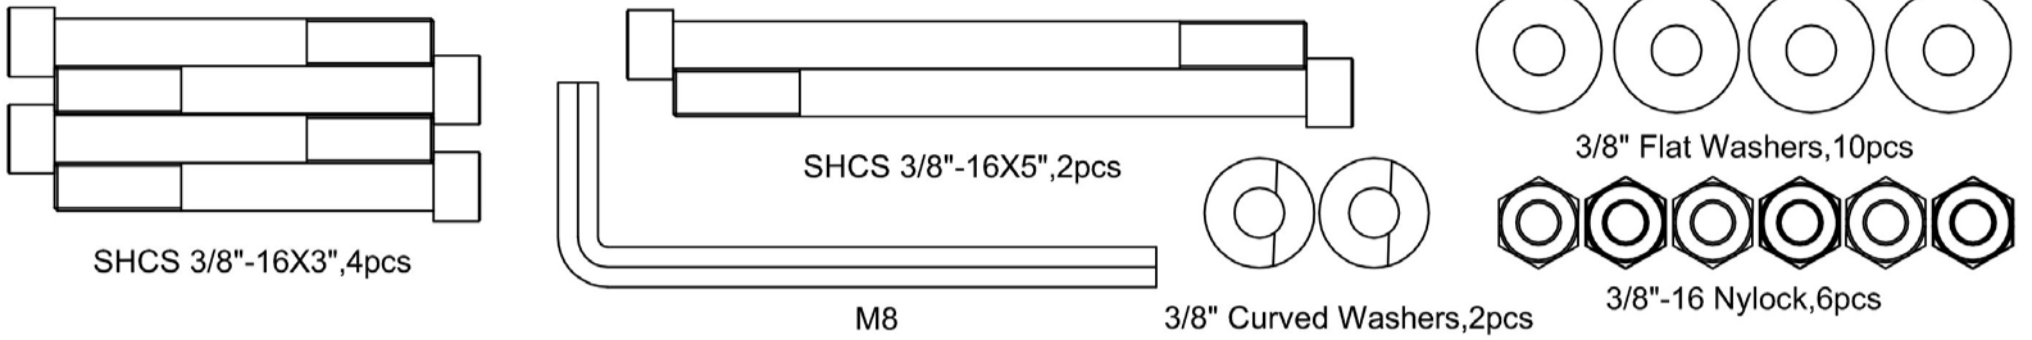

STEP 2:

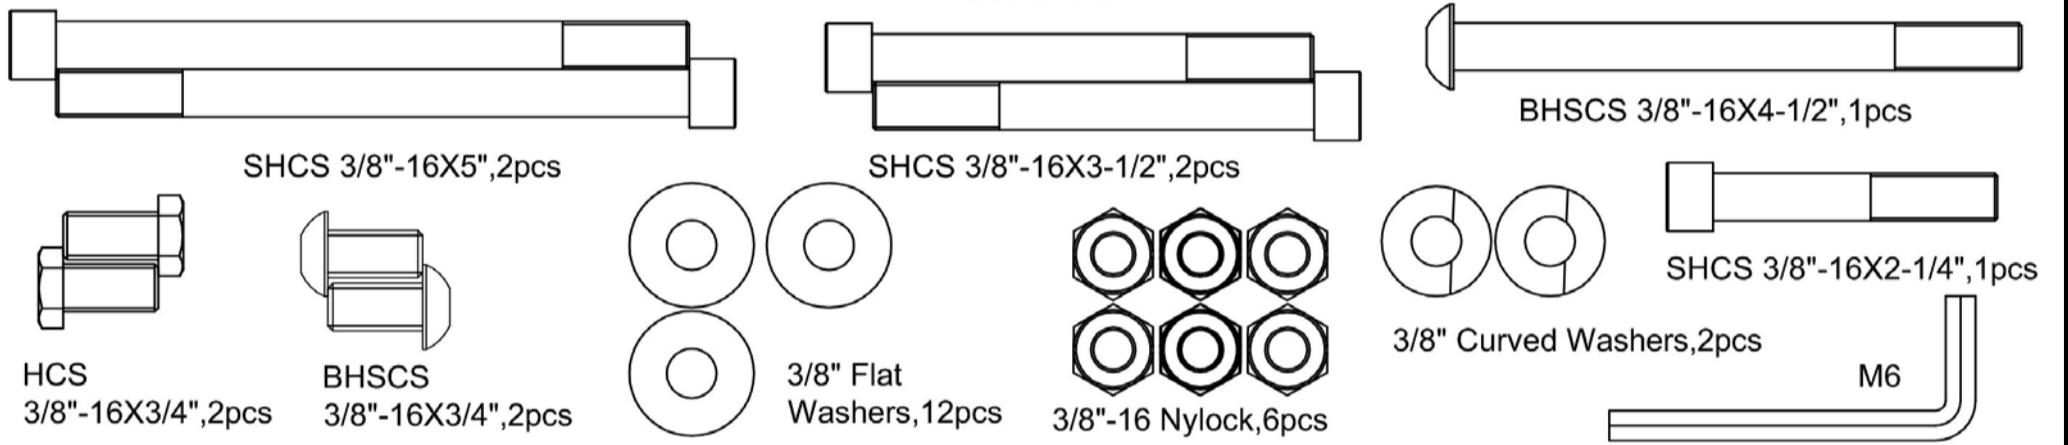


STEP 4:

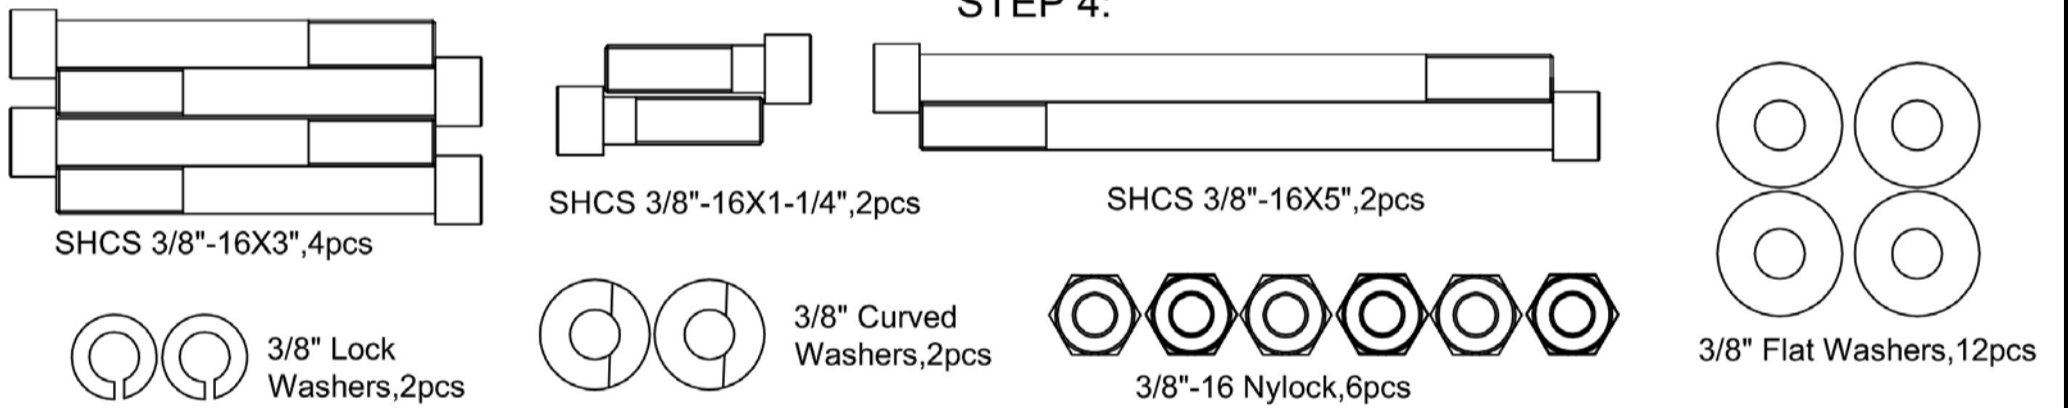


Hardware Blister Pack


STEP 5:

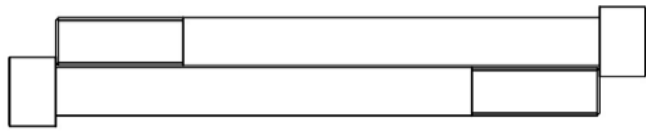


SHCS 3/8"-16X4-1/4",2pcs



SHCS 3/8"-16X2-3/4",2pcs




3/8" Flat Washers,8pcs




3/8"-16 Nylock,4pcs


STEP 6:

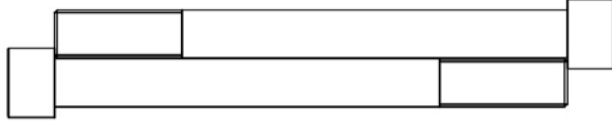

SHCS 3/8"-16X4",2pcs




FHSCS 3/8"-16X2-1/2" ,1pc

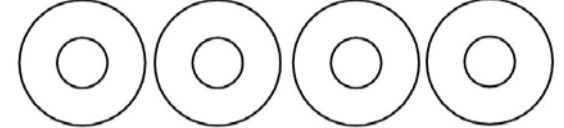

3/8" Flat Washers,5pcs



Axle,1pc



BHSCS
3/8"-16X1",2pcs




3/8"-16 Nylock,3pcs




3/8" Curved Washers,2pcs

STEP 7:



Cable Strap, 1pc
BFH-50227



1 1/4" Shoulder Bolt, 1pc
5/16"-18UNC Nylock,Black ,1pc




SHCS 3/8"-16X2",1pc




3/8"-16 Nylock,1pc


STEP 8:



SHCS 3/8"-16X2-3/4",2pcs

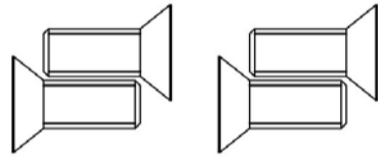

FHSCS 3/8"-16X1" ,4pcs




BHSCS 3/8"X3/4",2pcs



3/8" Lock
Washers,2pcs



3/8" Flat Washers,6pcs



3/8"-16
Nylock,4pcs




Step 1:

Note: Please Position Hardware in the same direction as shown in the figure. This will make future steps easier to assemble

All Flat Washers and Nylocks are 3/8" unless otherwise noted. Anywhere a washer is against the round side of a tube there is to be a 3/8" CURVED WASHER instead of a 3/8" FLAT WASHER.

DO NOT TIGHTEN BOLTS UNTIL STEP 2

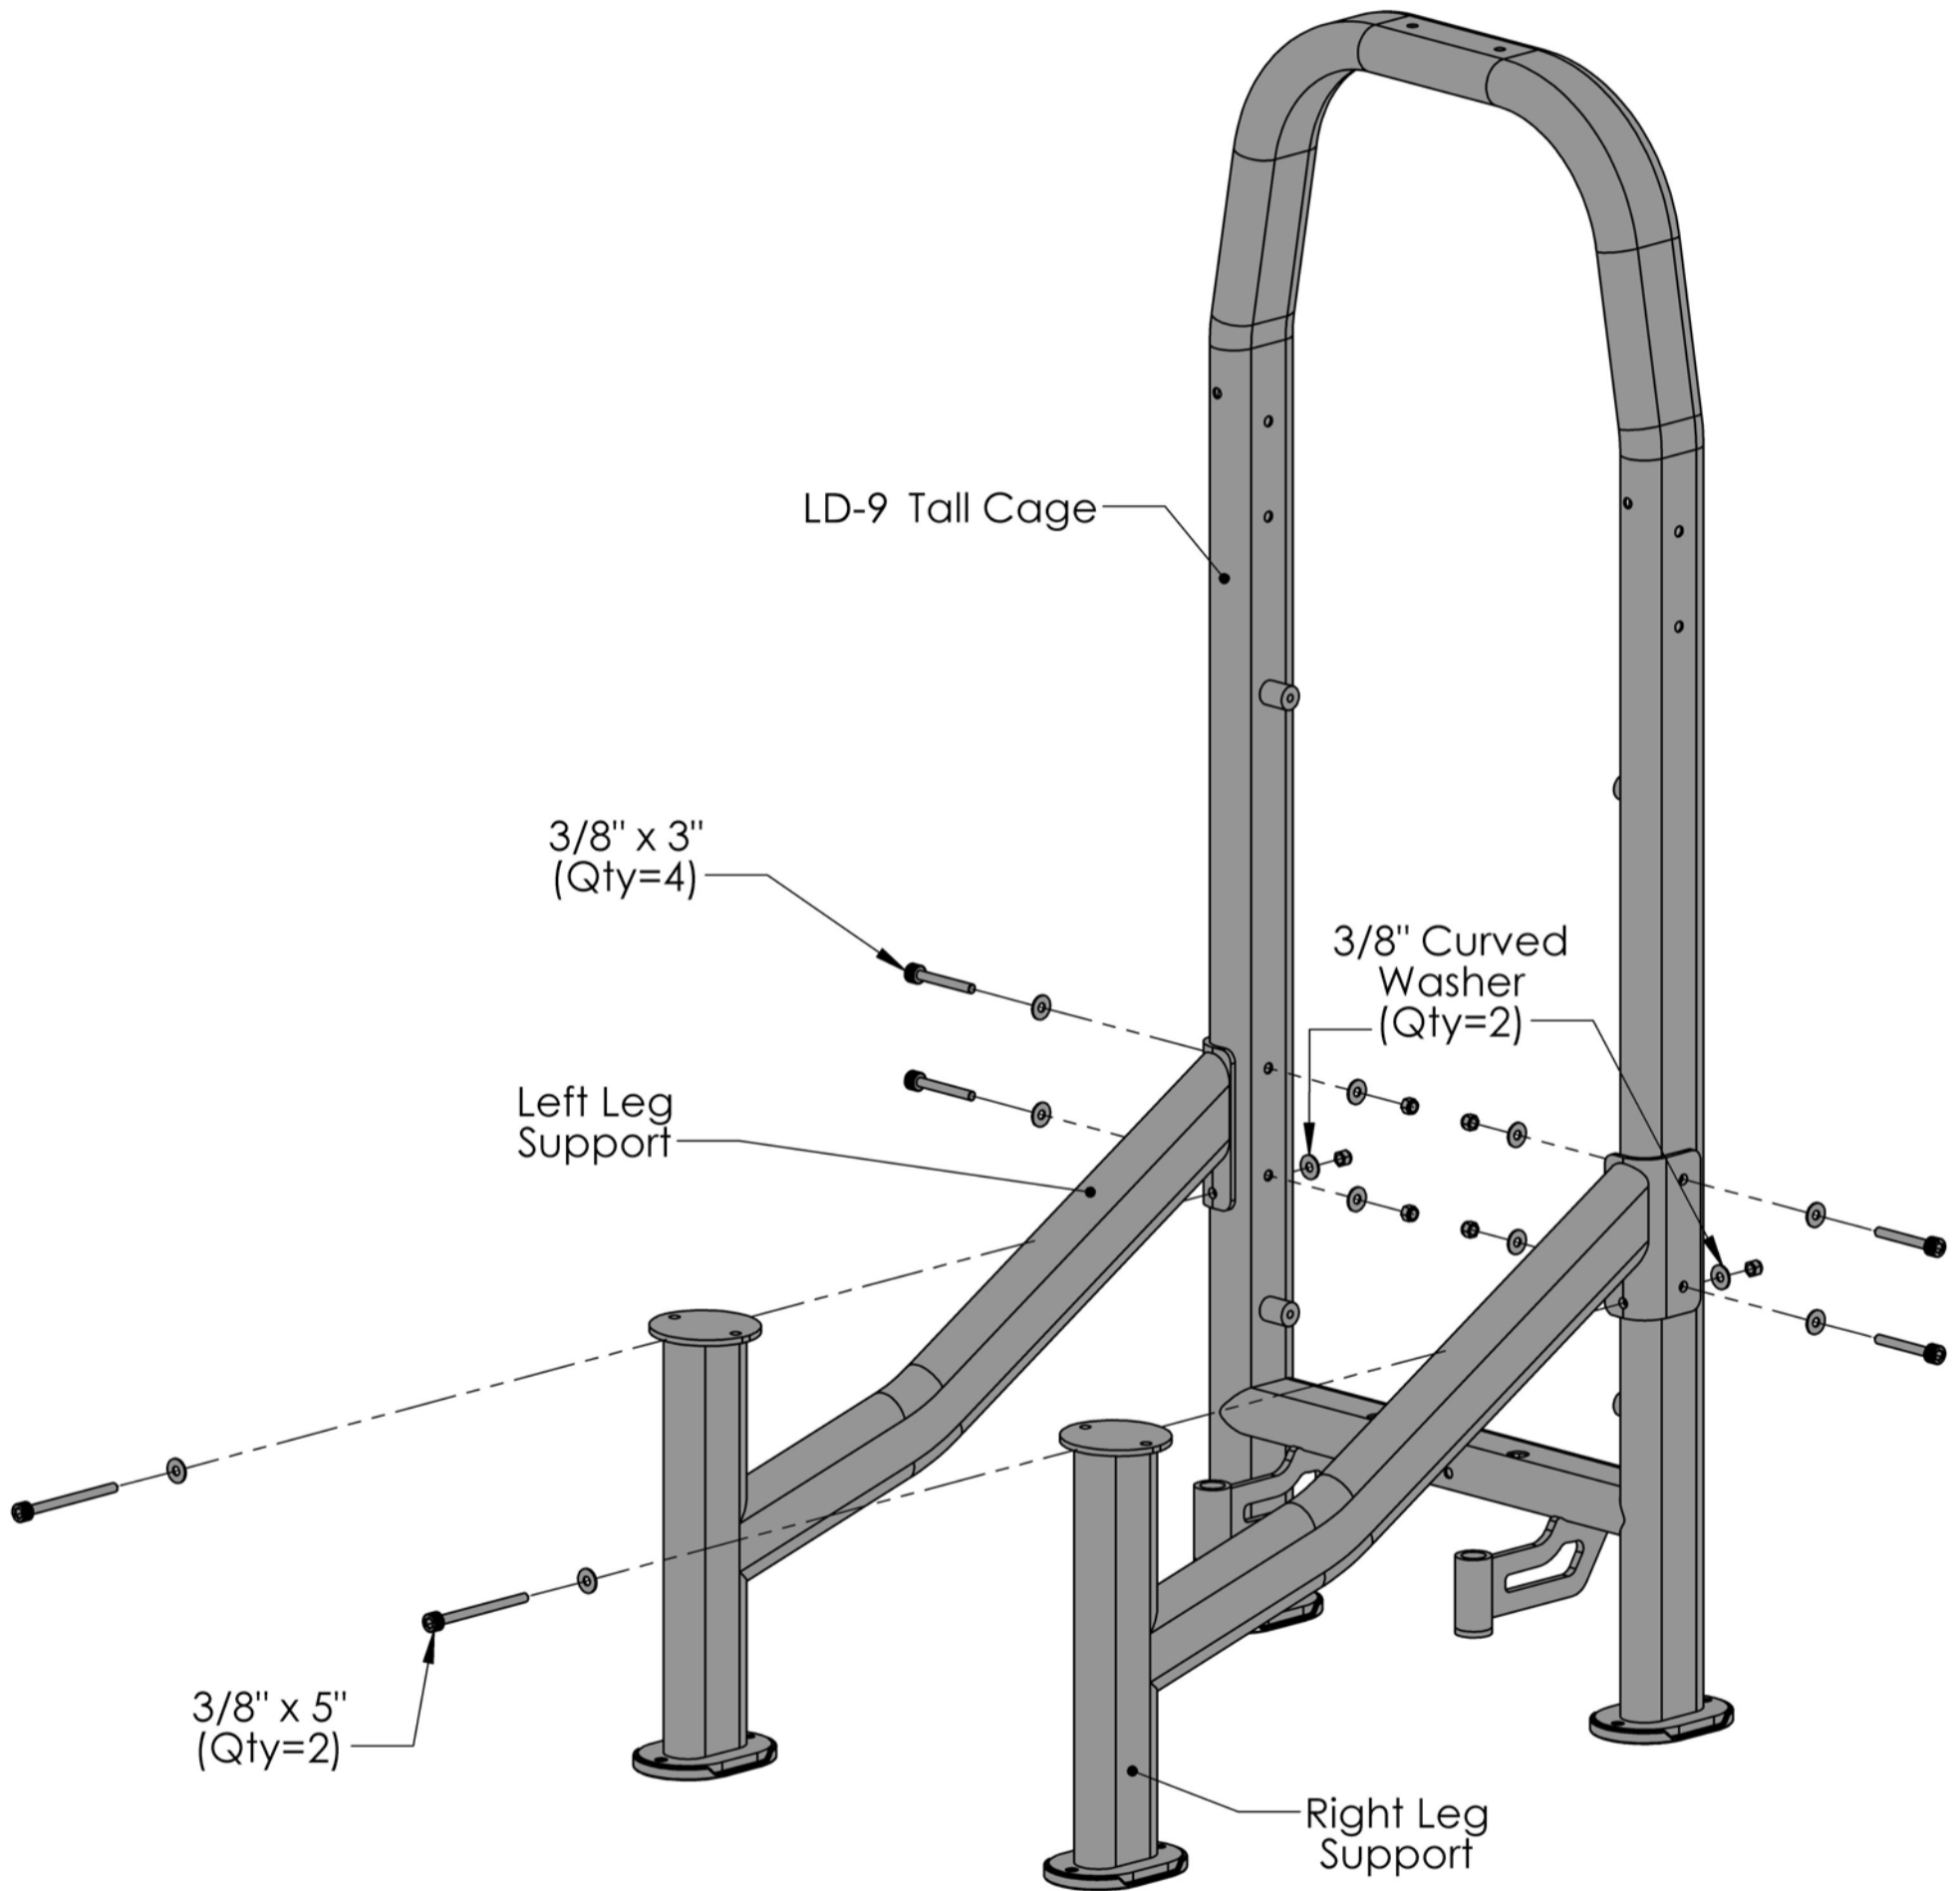


Item #	Part #	Description	Qty
1	BFP-10905	LD-9 Cage	1
2	BFP-10907	Right Leg Support	1
3	BFP-10906	Left Leg Support	1
38	BFP-51747	SHCS 3/8" x 3"	4
43	BFP-51799	SHCS 3/8" x 5"	2
46	BFH-50204	3/8" Curved Washer	2
47	BFH-50146	3/8" Flat Washer	10
48	BFH-50157	3/8" Nylock	6

Step 2:

! Make sure all bolts are tightened **EXCEPT FOR THE FOUR BOLTS ON THE SHROUD** before moving on. Do not tighten the bolts for the shroud until step 6.

To counter balance the seat, pin the weight stack on the third plate from the top as shown in the figure to the right. Use a BHSCS 3/8" x 4 1/2" bolt. Refer to figure on page 16.

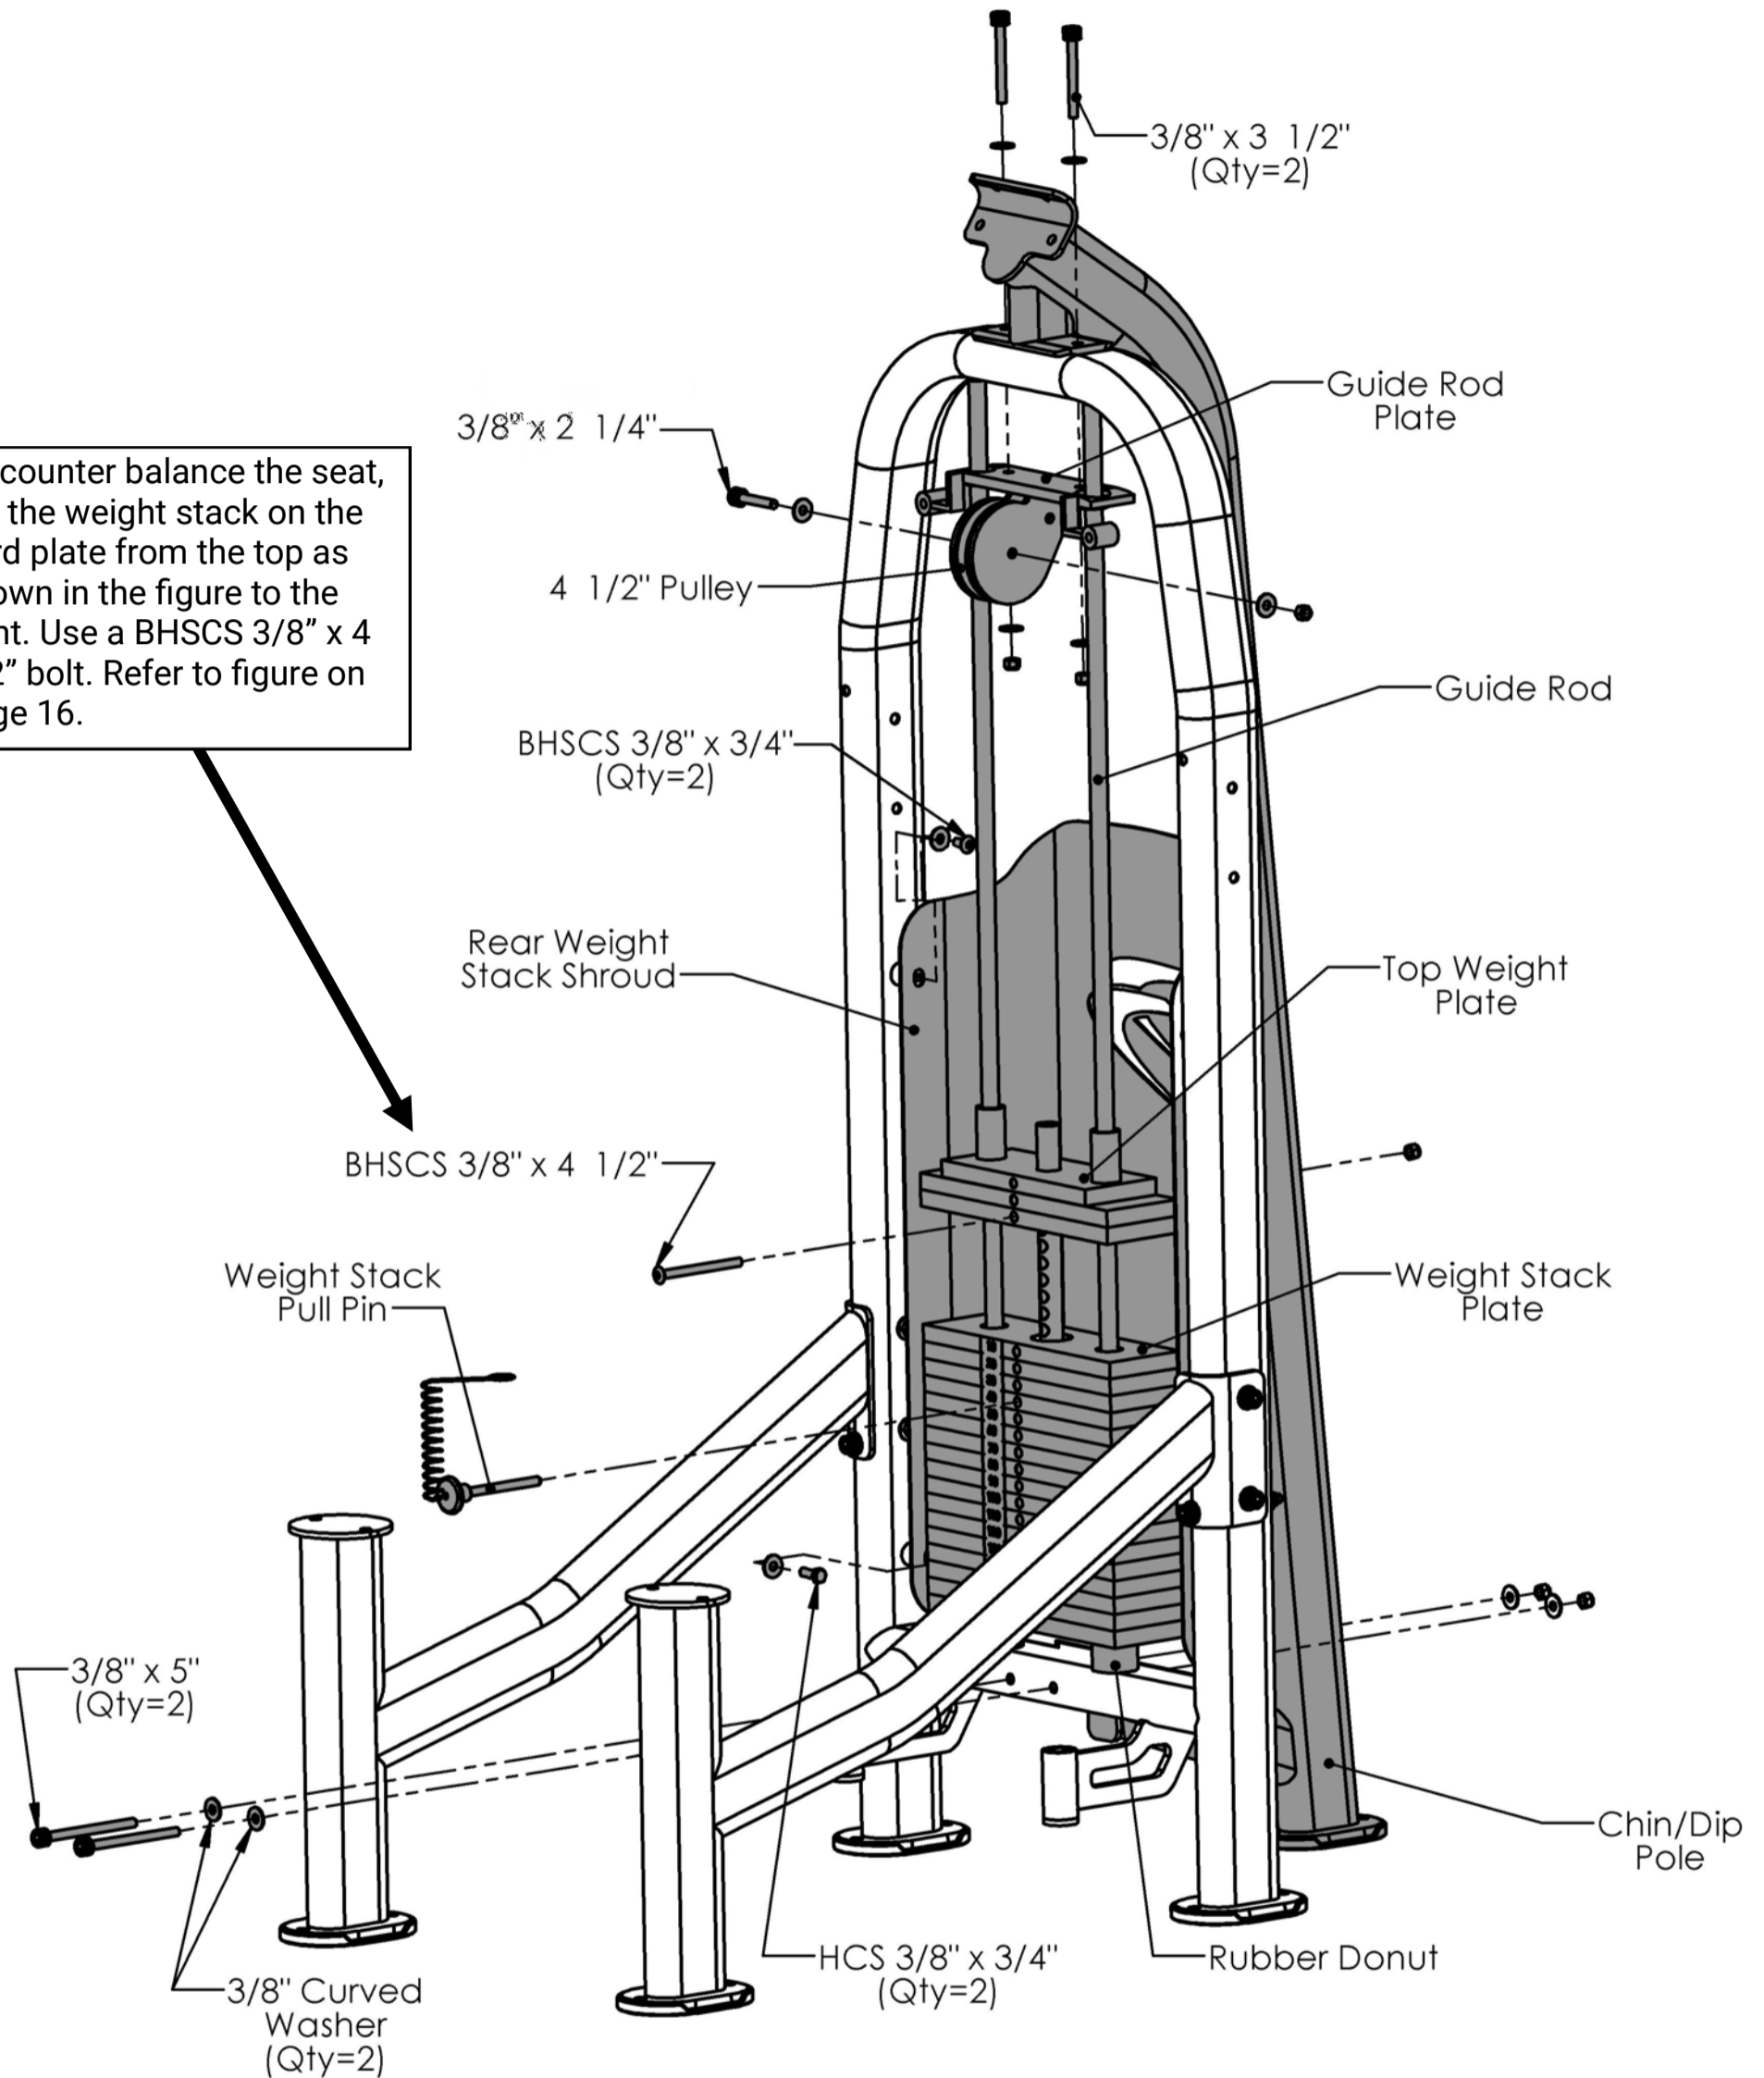

All Flat Washers and Nylocks are 3/8" unless otherwise noted. Anywhere a washer is against the round side of a tube there is to be a **3/8" CURVED WASHER** instead of a **3/8" FLAT WASHER**.


Item #	Part #	Description	Qty
4	BFP-10914	Chin/Dip Pole	1
5	BFP-10849	Guide Rod Plate	1
6	BFP-51745	Guide Rod	2
7	BFM-10413	Top Weight Plate	1
8	BFM-50632	Weight Stack Plate	19
9	BFH-50529	Rubber Donut	2
10	BFP-51740	Rear Weight Stack Shroud	1
26	BFM-51173	Weight Stack Pull Pin	1

Item #	Part #	Description	Qty
28	BFH-50174	4 1/2" Pulley	1
29	BFP-52340	BHSCS 3/8" x 3/4"	2
30	BFH-50254	HCS 3/8" x 3/4"	2
35	BFP-51752	SHCS 3/8" x 2 1/4"	1
39	BFP-51760	SHCS 3/8" x 3 1/2"	2
42	BFP-52379	BHSCS 3/8" x 4 1/2"	1
43	BFP-51799	SHCS 3/8" x 5"	2
46	BFH-50204	3/8" Curved Washer	2
47	BFH-50146	3/8" Flat Washer	12
48	BFH-50157	3/8" x Nylock	6

Step 3:



Make Sure All Bolts are Tightened Before Moving On

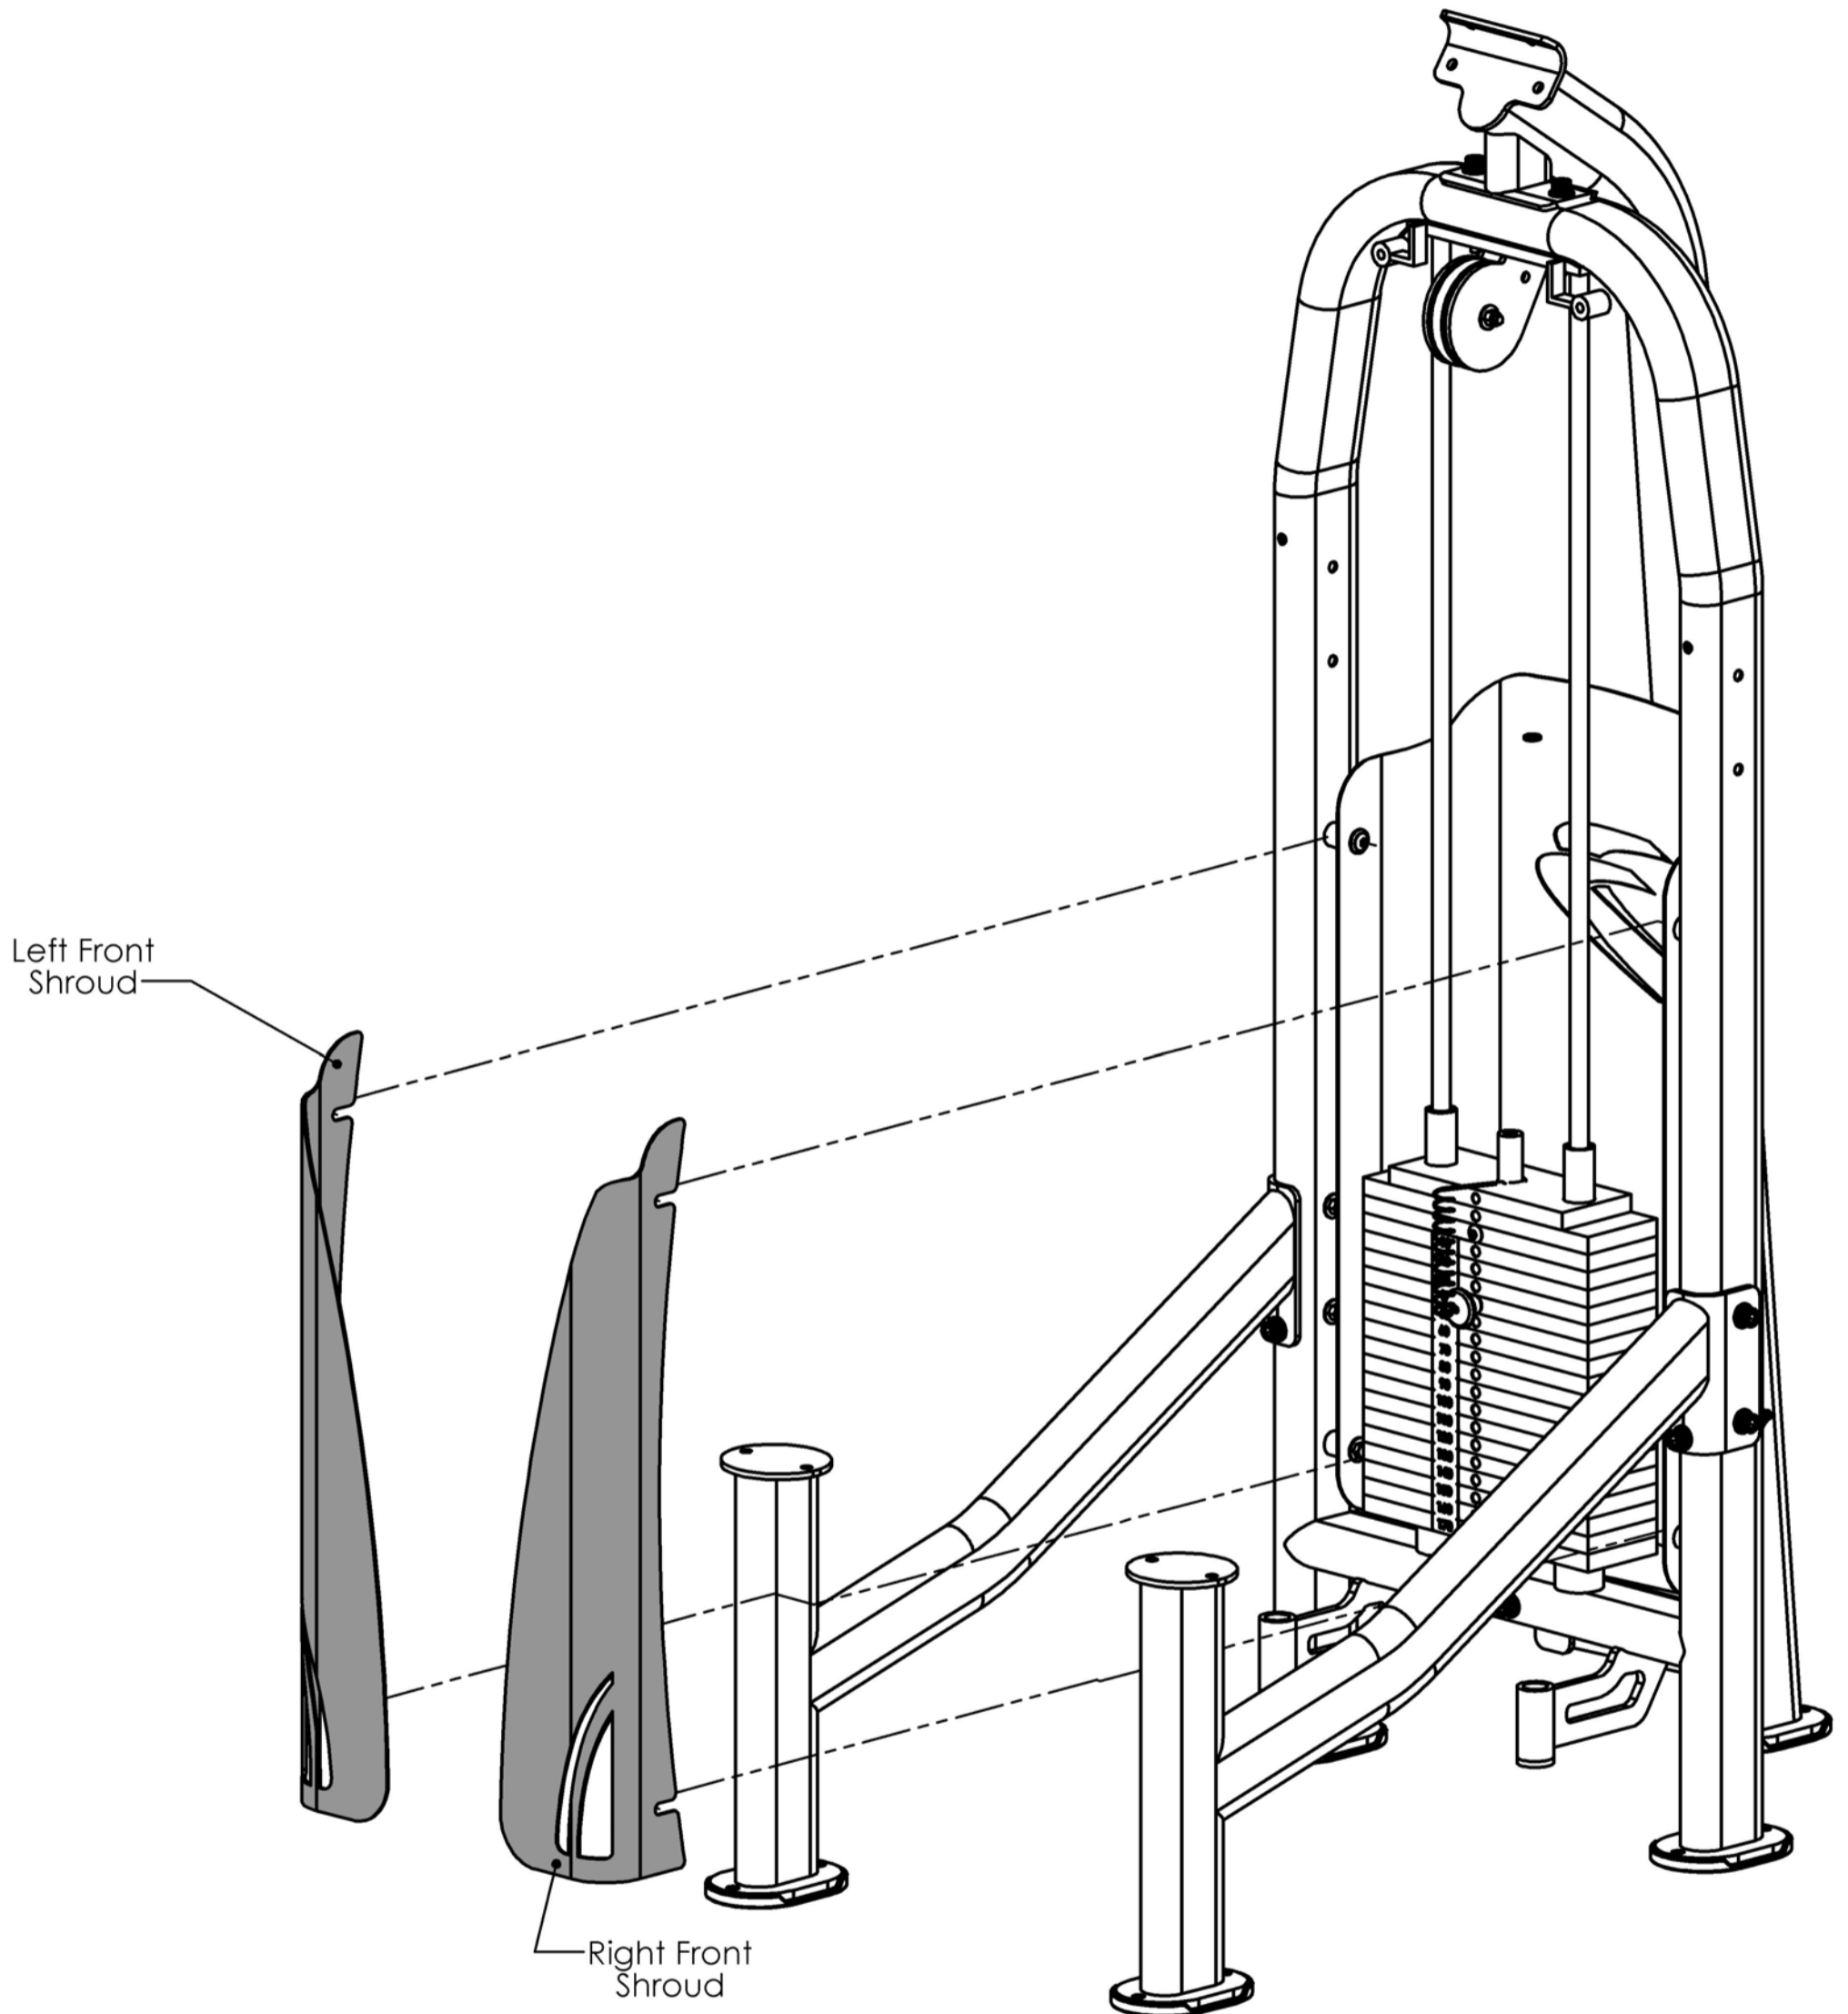


All Flat Washers and Nylocks are 3/8" unless otherwise noted.
Anywhere a washer is against the round side of a tube there is to be a **3/8" CURVED WASHER** instead of a **3/8" FLAT WASHER**.

Item #	Part #	Description	Qty
21	BFP-51742	Right Weight Stack Shroud	1
22	BFP-51741	Left Weight Stack Shroud	1

Step: 4



Make Sure All Bolts are Tightened Before Moving On

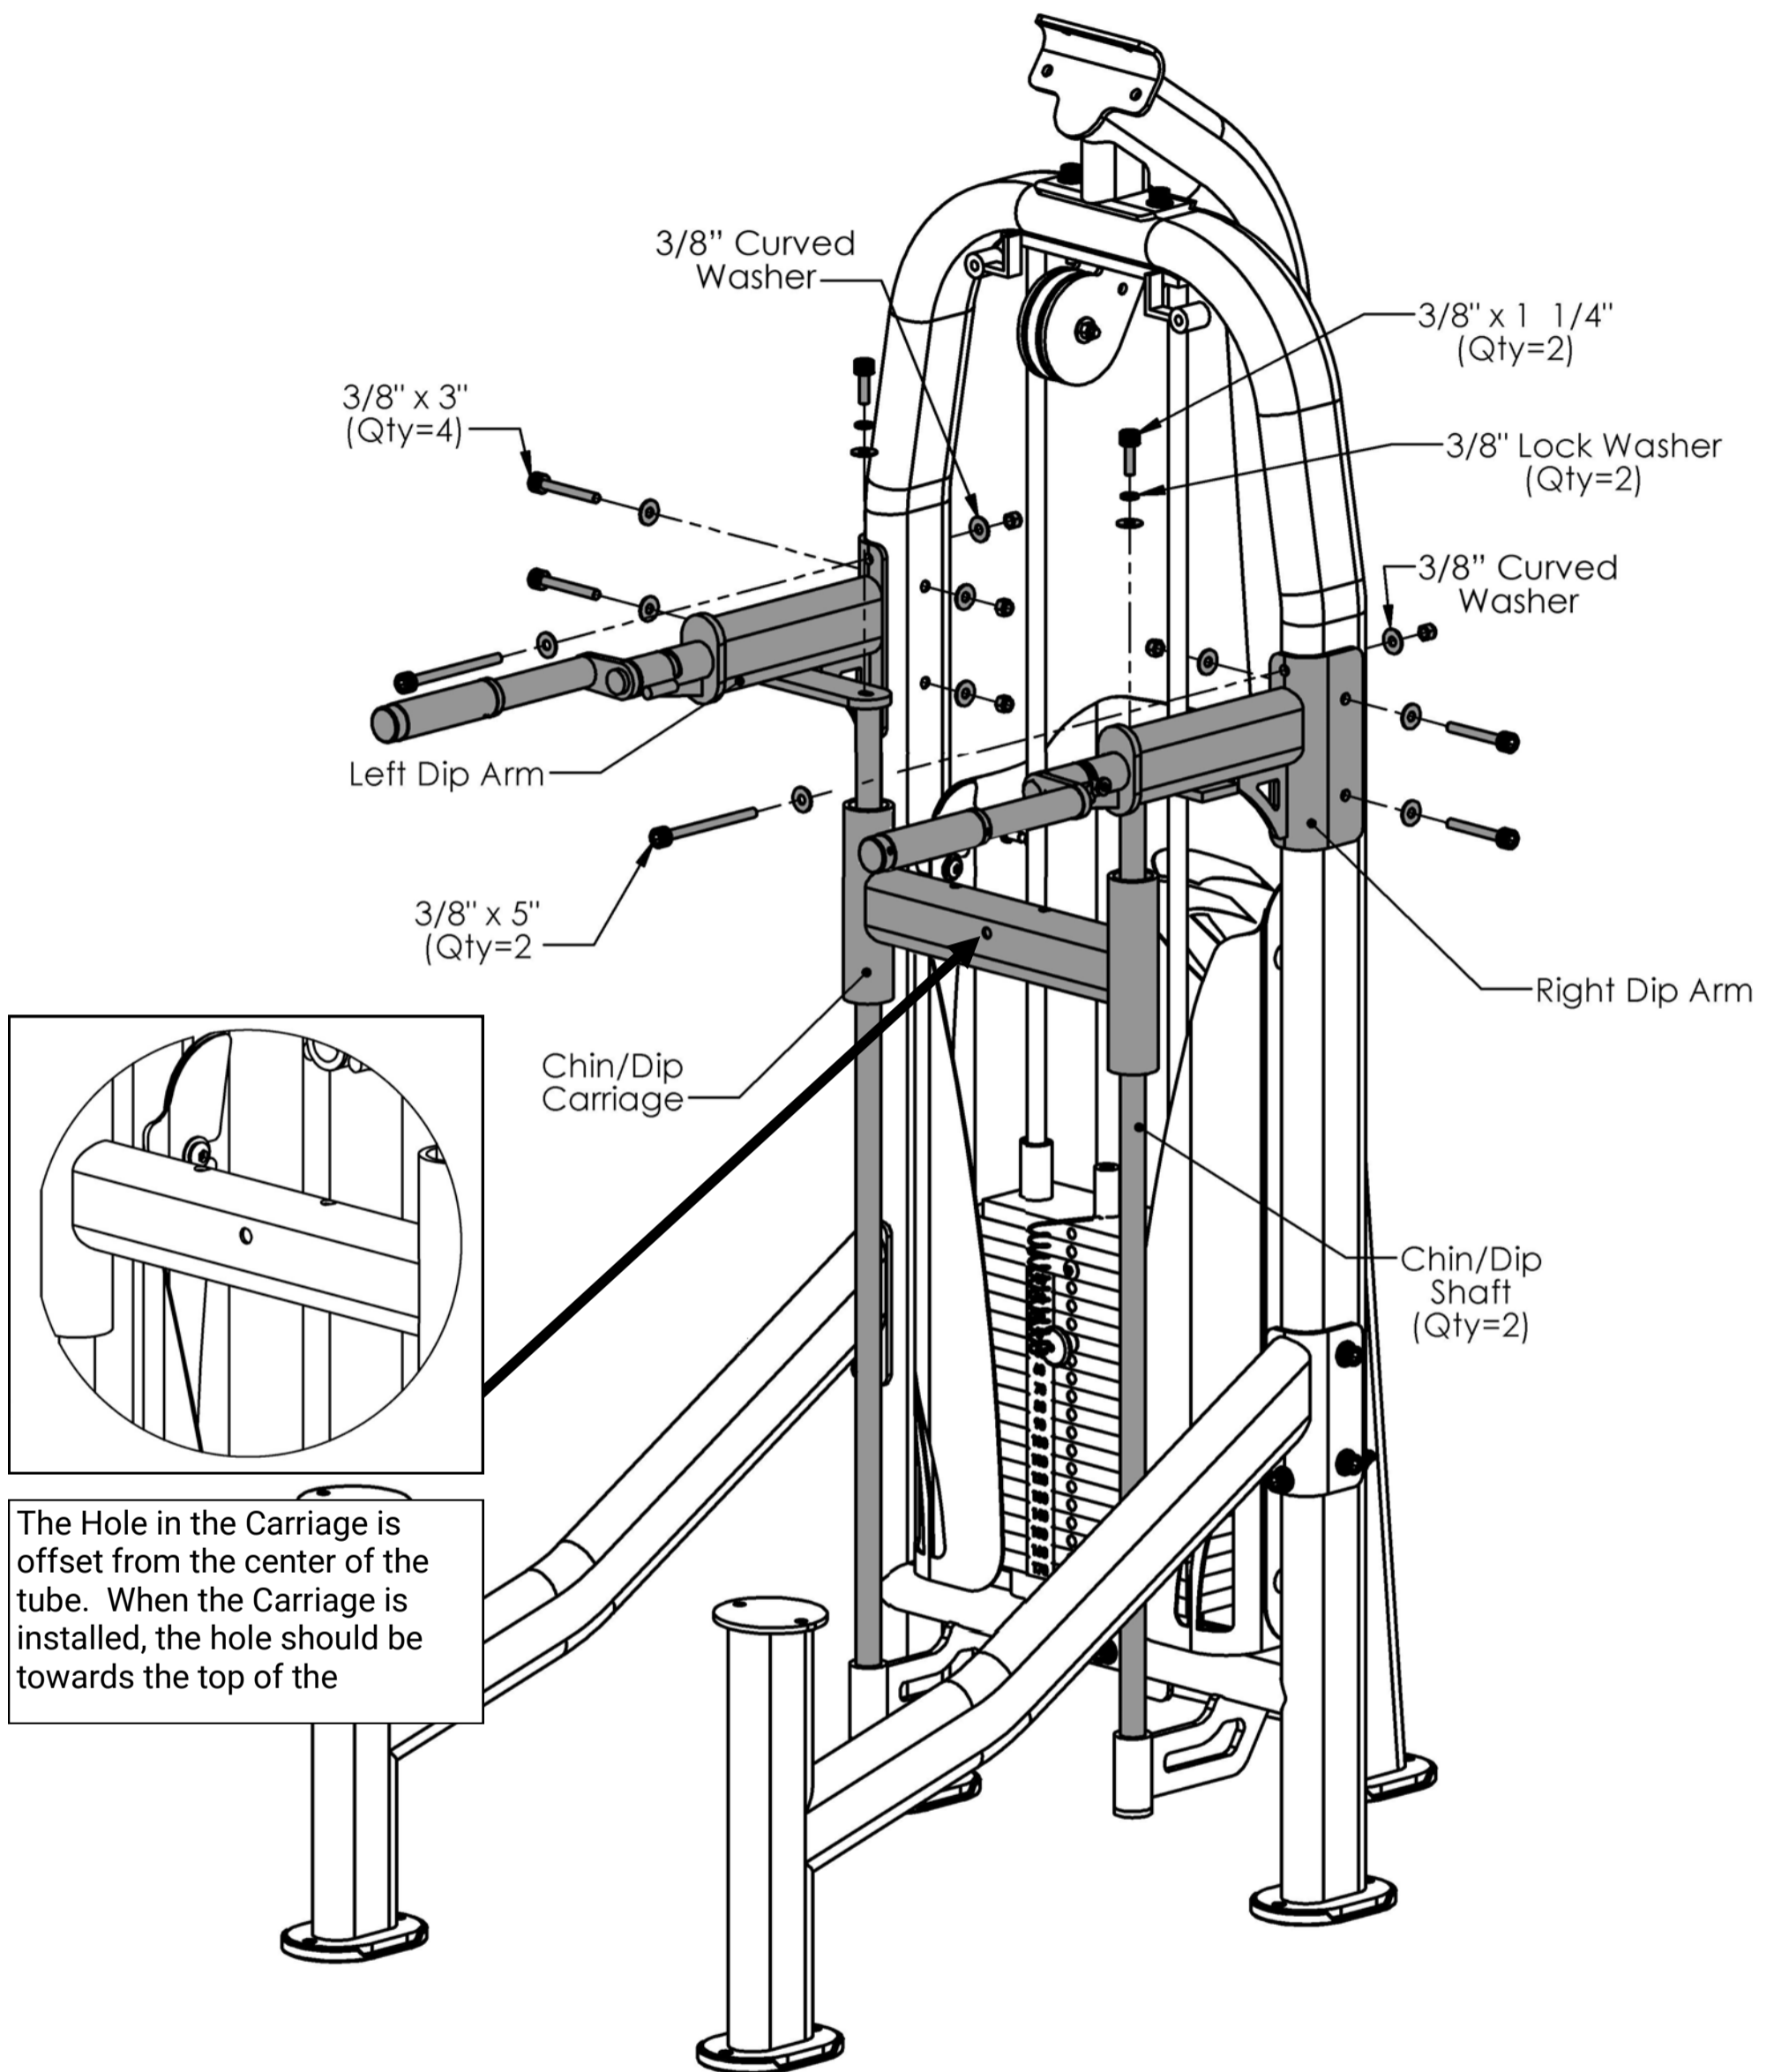

The Hole in the Carriage is offset from the center of the tube. When the Carriage is installed, the hole should be towards the top of the


Item #	Part #	Description	Qty
12	BFP-10909	Right Dip Arm	1
13	BFP-10908	Left Dip Arm	1
14	BFP-10910	Chin/Dip Carriage	1
15	BFM-50924	Chin/Dip Shaft	2
33	BFP-51653	SHCS 3/8" x 1 1/4"	2
38	BFP-51747	SHCS 3/8" x 3"	4
43	BFP-51799	SHCS 3/8" x 5"	2
45	BFH-50147	3/8" Lock Washer	2
46	BFH-50204	3/8" Curved Washer	2
47	BFH-50146	3/8" Flat Washer	12
48	BFH-50157	3/8" Nylock	6

All Flat Washers and Nylocks are 3/8" unless otherwise noted. Anywhere a washer is against the round side of a tube there is to be a **3/8" CURVED WASHER** instead of a **3/8" FLAT WASHER**.

Step 5:



Make Sure All Bolts are Tightened Before Moving On

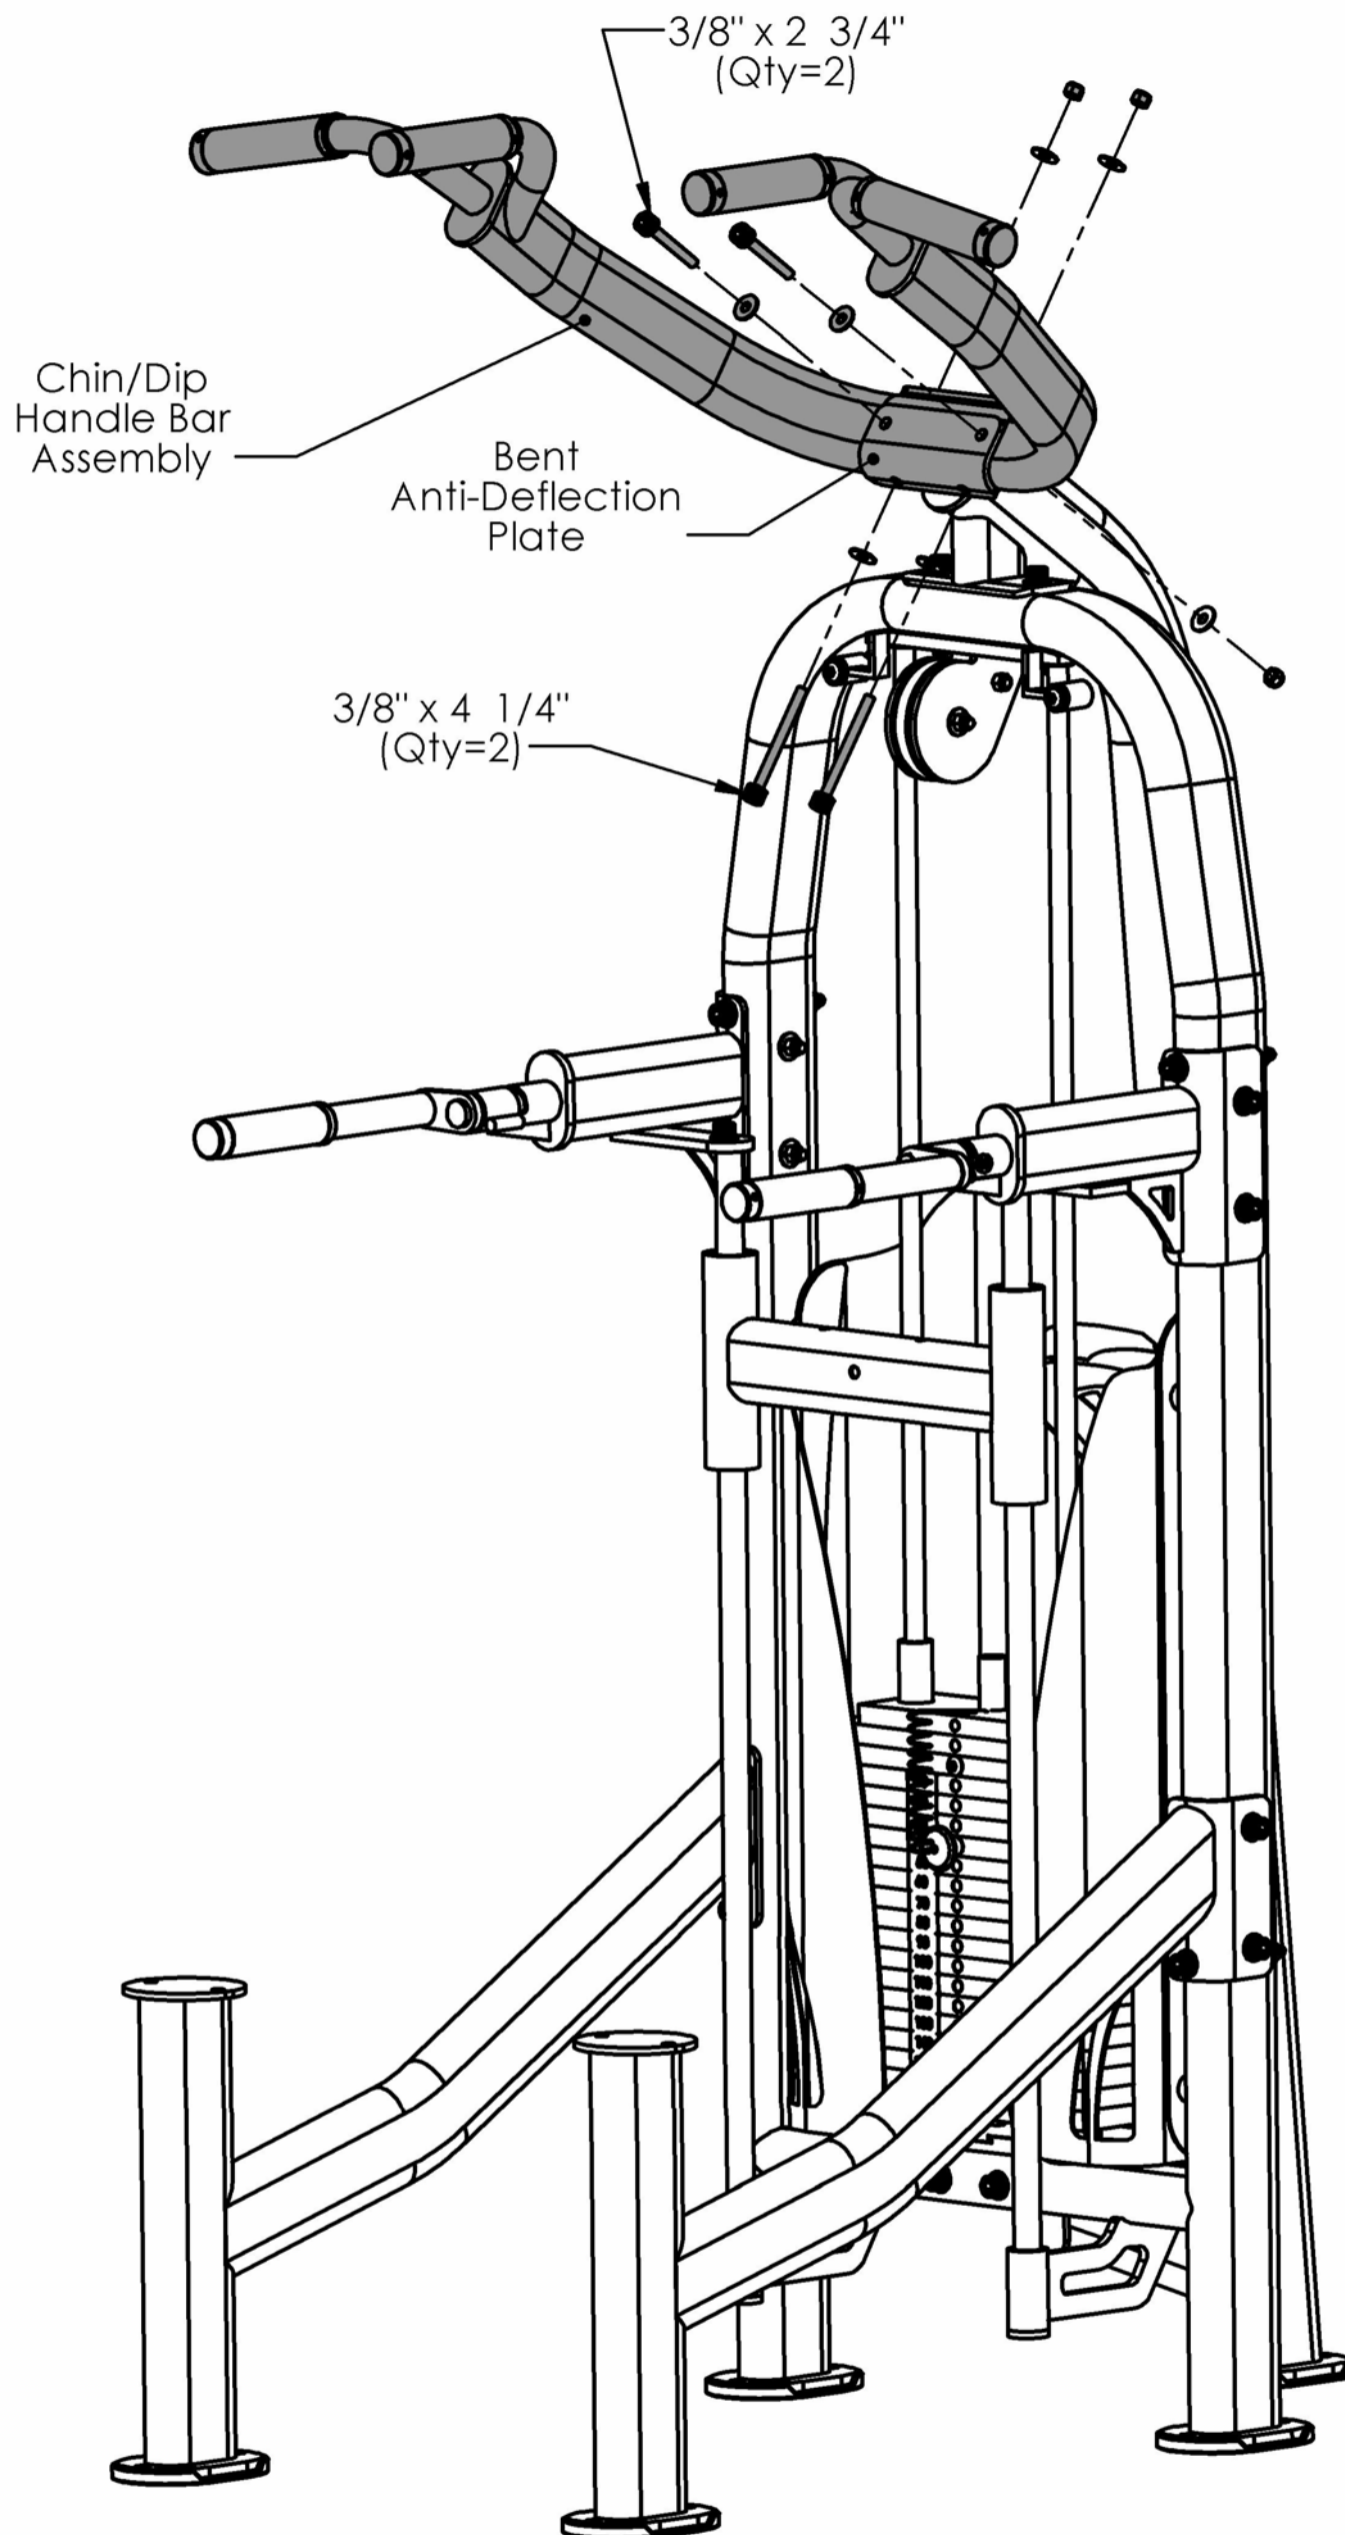


All Flat Washers and Nylocks are 3/8" unless otherwise noted.

Item #	Part #	Description	Qty
16	BFP-10915	Chin/Dip Handle Bar Assembly	1
17	BFP-52013	Bent Anti-Deflection Plate	1
37	BFP-51750	SHCS 3/8" x 2 3/4"	2
41	BFP-51884	SHCS 3/8" x 4 1/4"	2
47	BFH-50146	3/8" Flat Washer	8
48	BFH-50157	3/8" Nylock	4

Step 6:



Make Sure All Bolts are Tightened Before Moving On

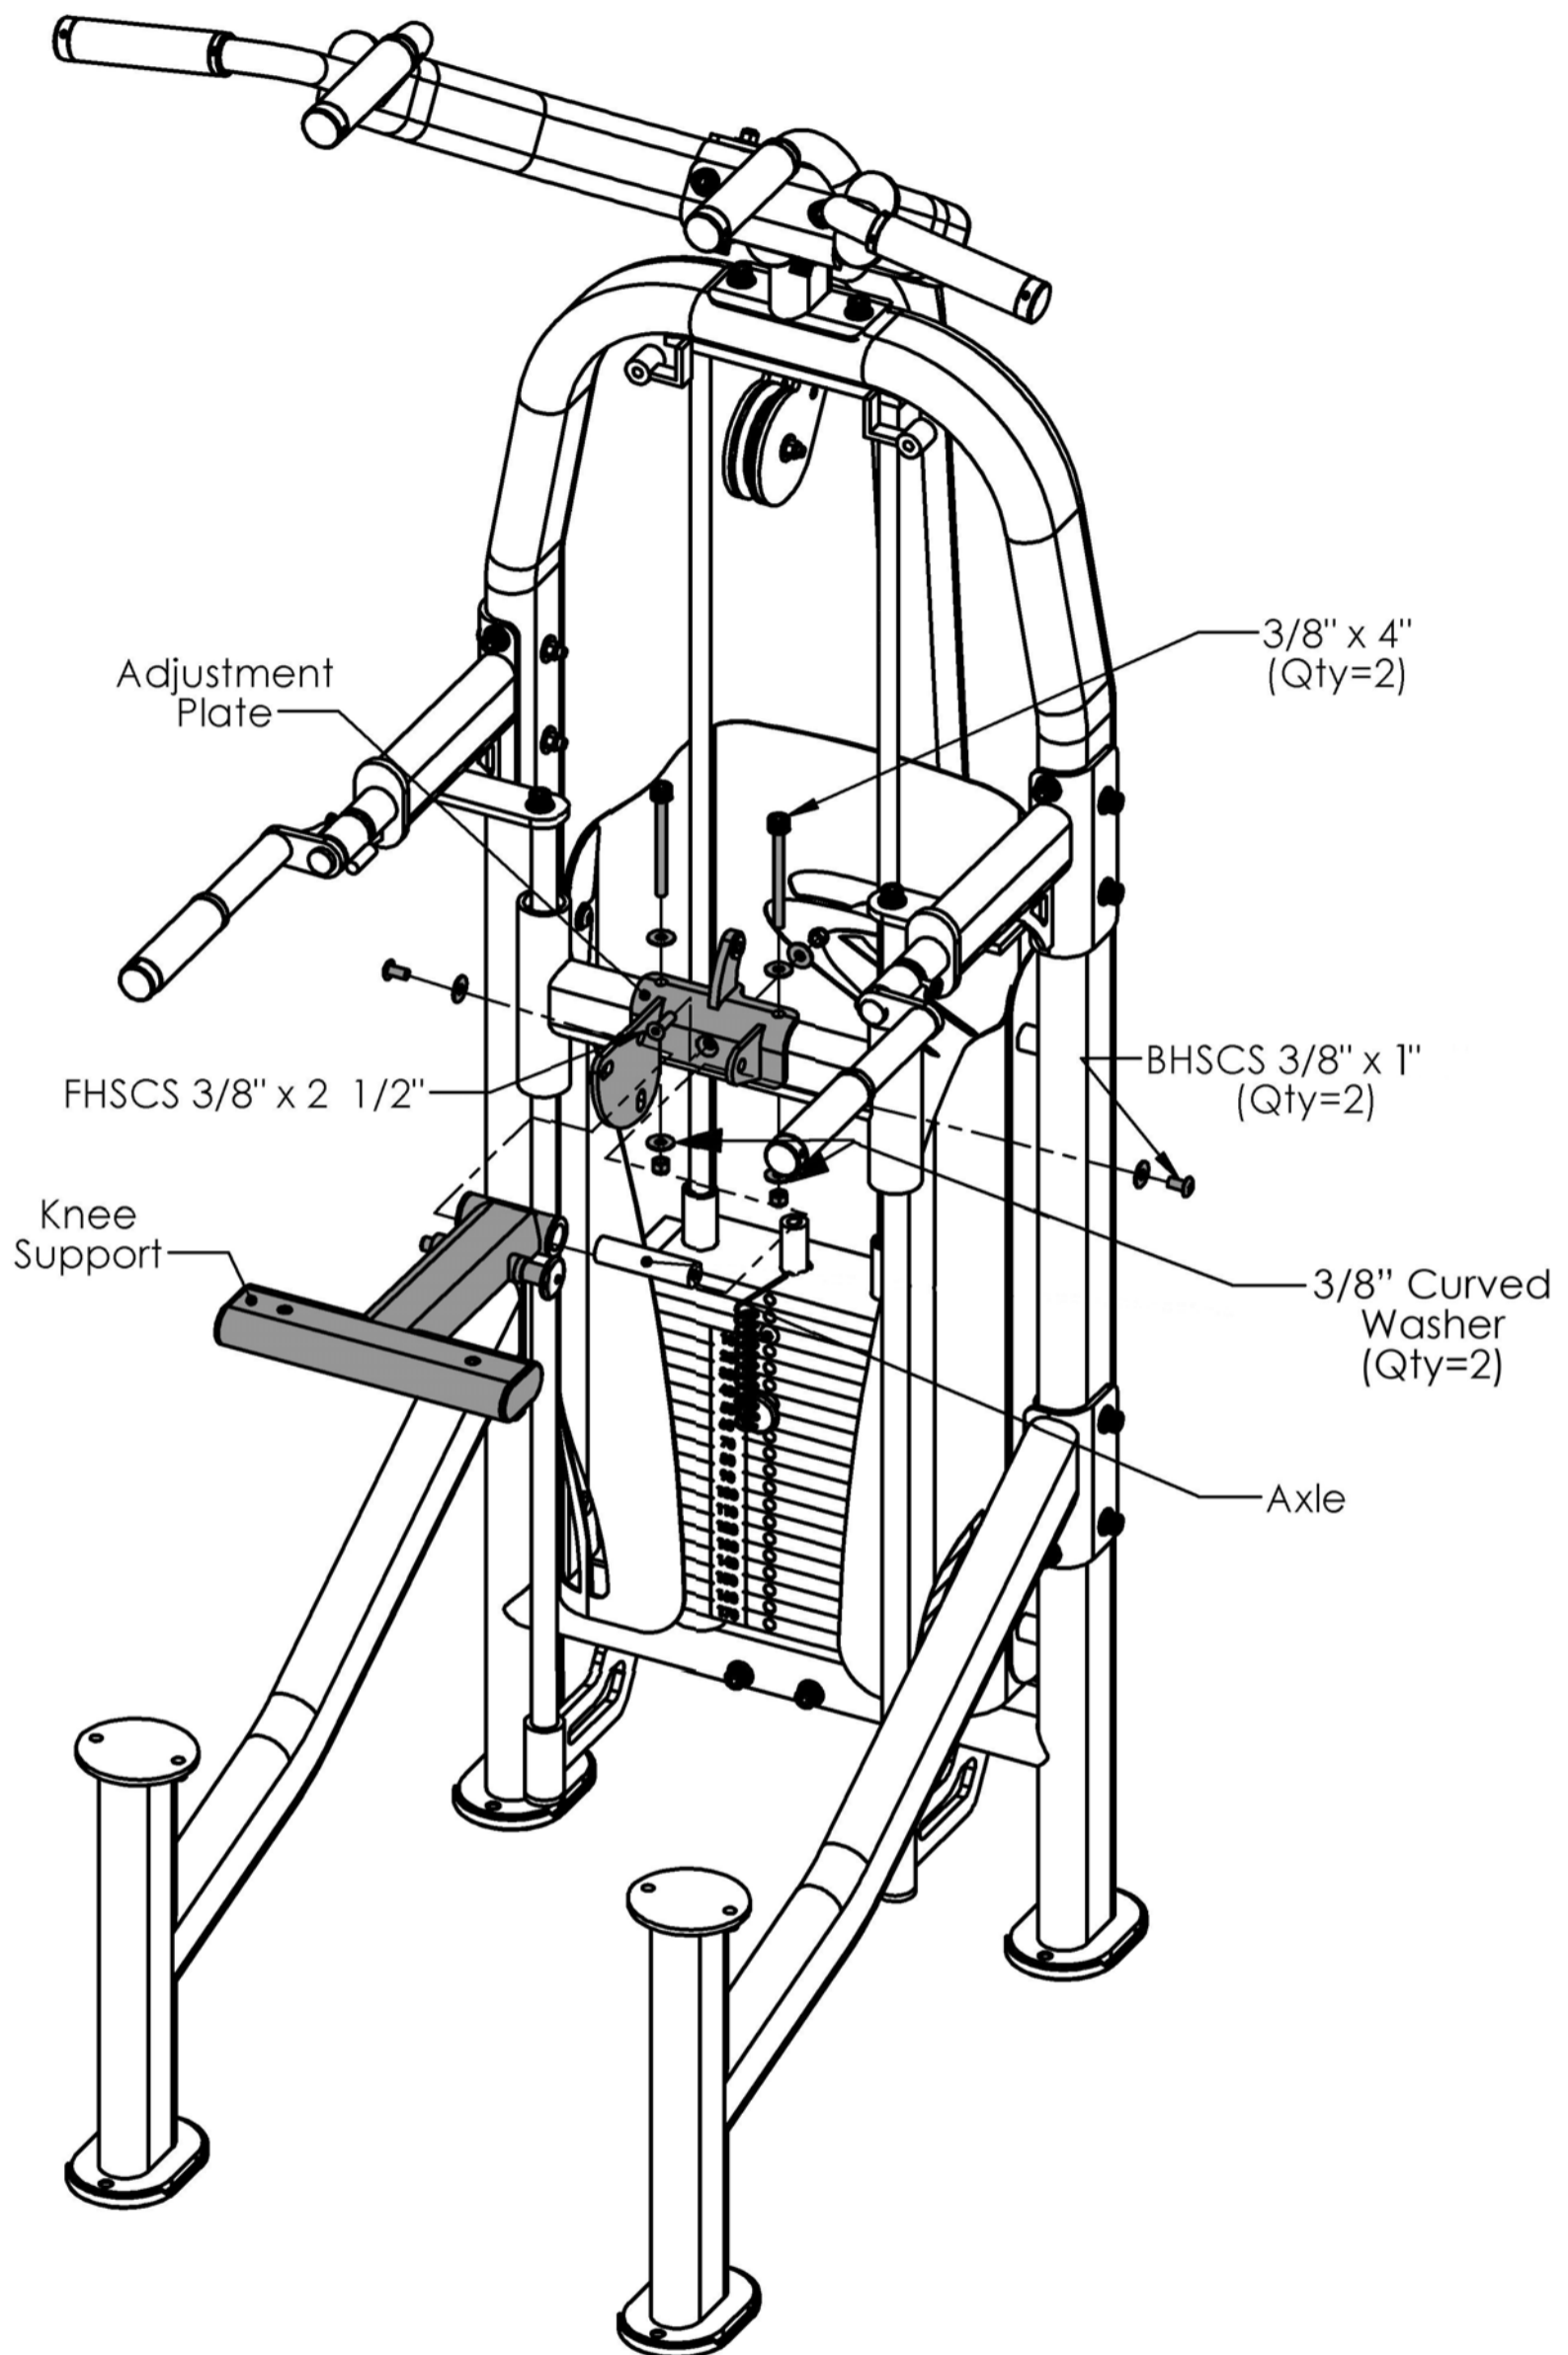



All Flat Washers and Nylocks are 3/8" unless otherwise noted. Anywhere a washer is against the round side of a tube there is to be a **3/8" CURVED WASHER** instead of a **3/8" FLAT WASHER**.

Item #	Part #	Description	Qty
18	BFP-10911	Adjustment Plate	1
19	BFP-10912	Knee Support	1
20	BFP-51995	Axle	1
36	BFP-52378	FHSCS 3/8" x 2 1/2"	1
40	BFP-52345	SHCS 3/8" x 4"	2
46	BFH-50204	3/8" Curved Washer	2
47	BFH-50146	3/8" Flat Washer	5
48	BFH-50157	3/8" Nylock	3
51	BFH-50620	BHSCS 3/8" x 1"	2


Step 7:



Make Sure All Bolts are Tightened Before Moving On

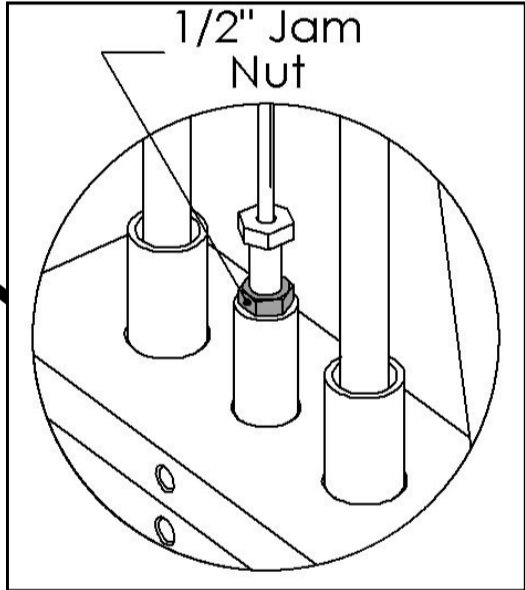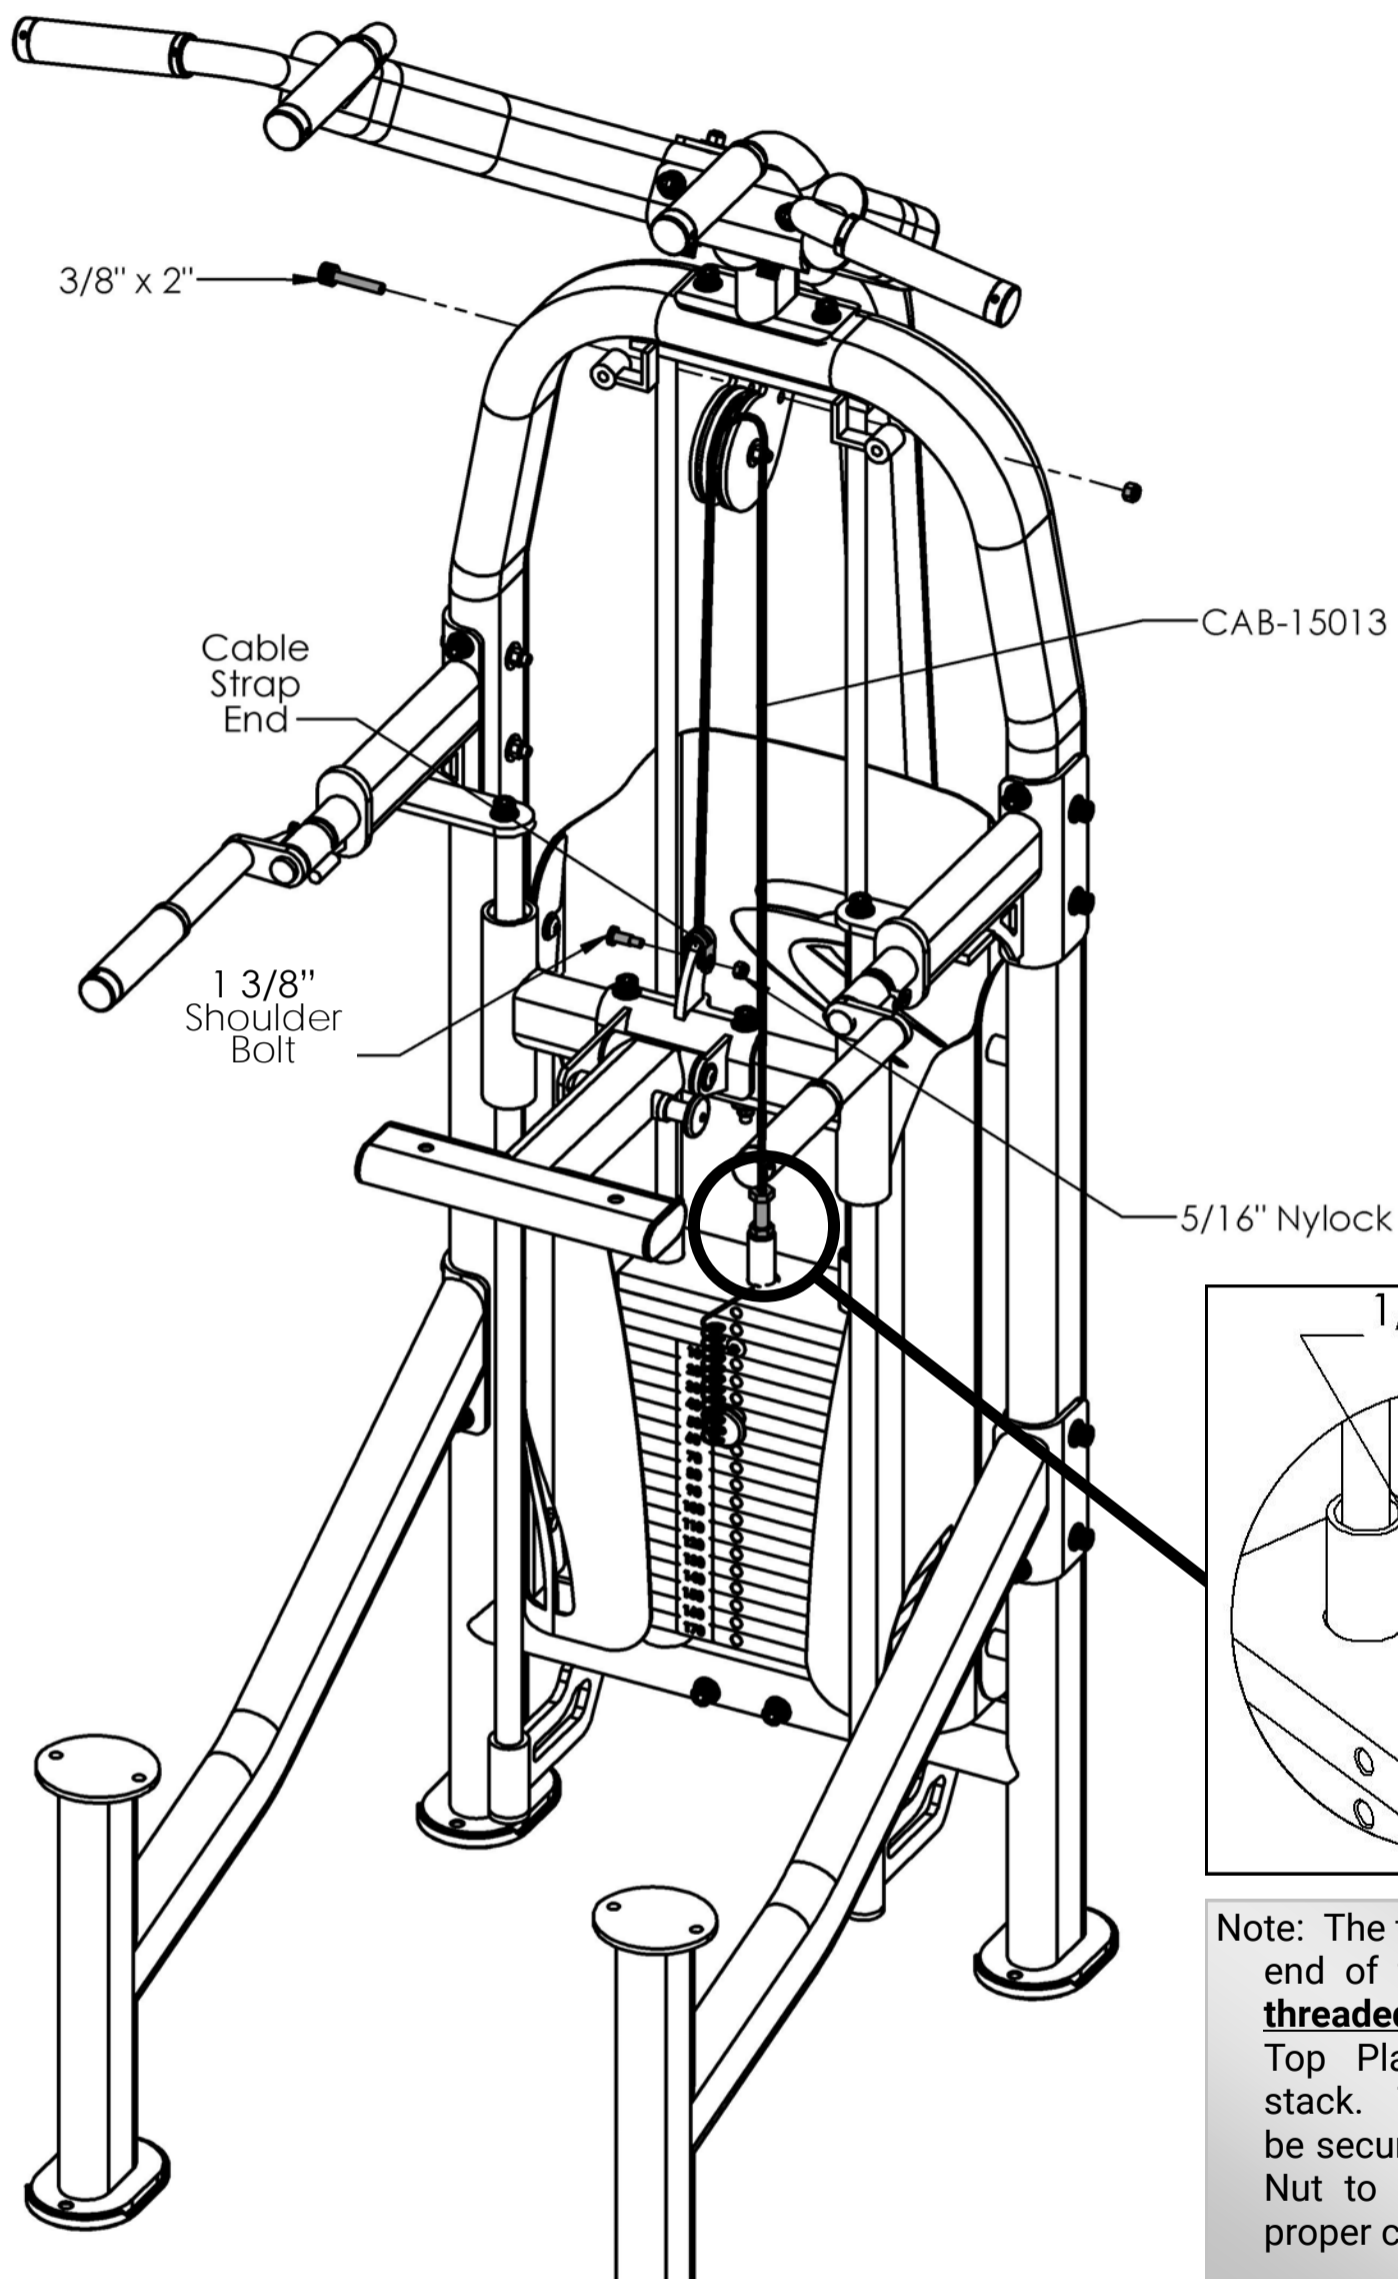

Note: The threaded bolt on the end of the cable **must be threaded at least 1/2"** the Top Plate of the weight stack. The bolt must also be secured with a 1/2" Jam Nut to ensure a safe and proper connection.

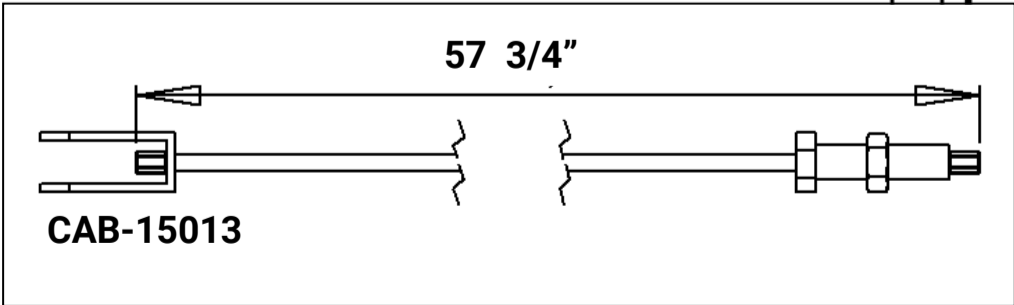


All Flat Washers and Nylocks are 3/8" unless otherwise noted. Anywhere a washer is against the round side of a tube there is to be a **3/8" CURVED WASHER** instead of a **3/8" FLAT WASHER**.

Item #	Part #	Description	Qty
25	CAB-15013	Weight Stack to Cable Lockout Cable	1
49	BFH-50227	Cable Strap End	1
32	BFH-50351	1 3/8" Shoulder Bolt	1
34	BFP-51759	SHCS 3/8" x 2"	1
44	BFH-50267	5/16 Nylock	1
48	BFH-50157	3/8" Nylock	1

Step 8:



Make Sure All Bolts are Tightened Before Moving On

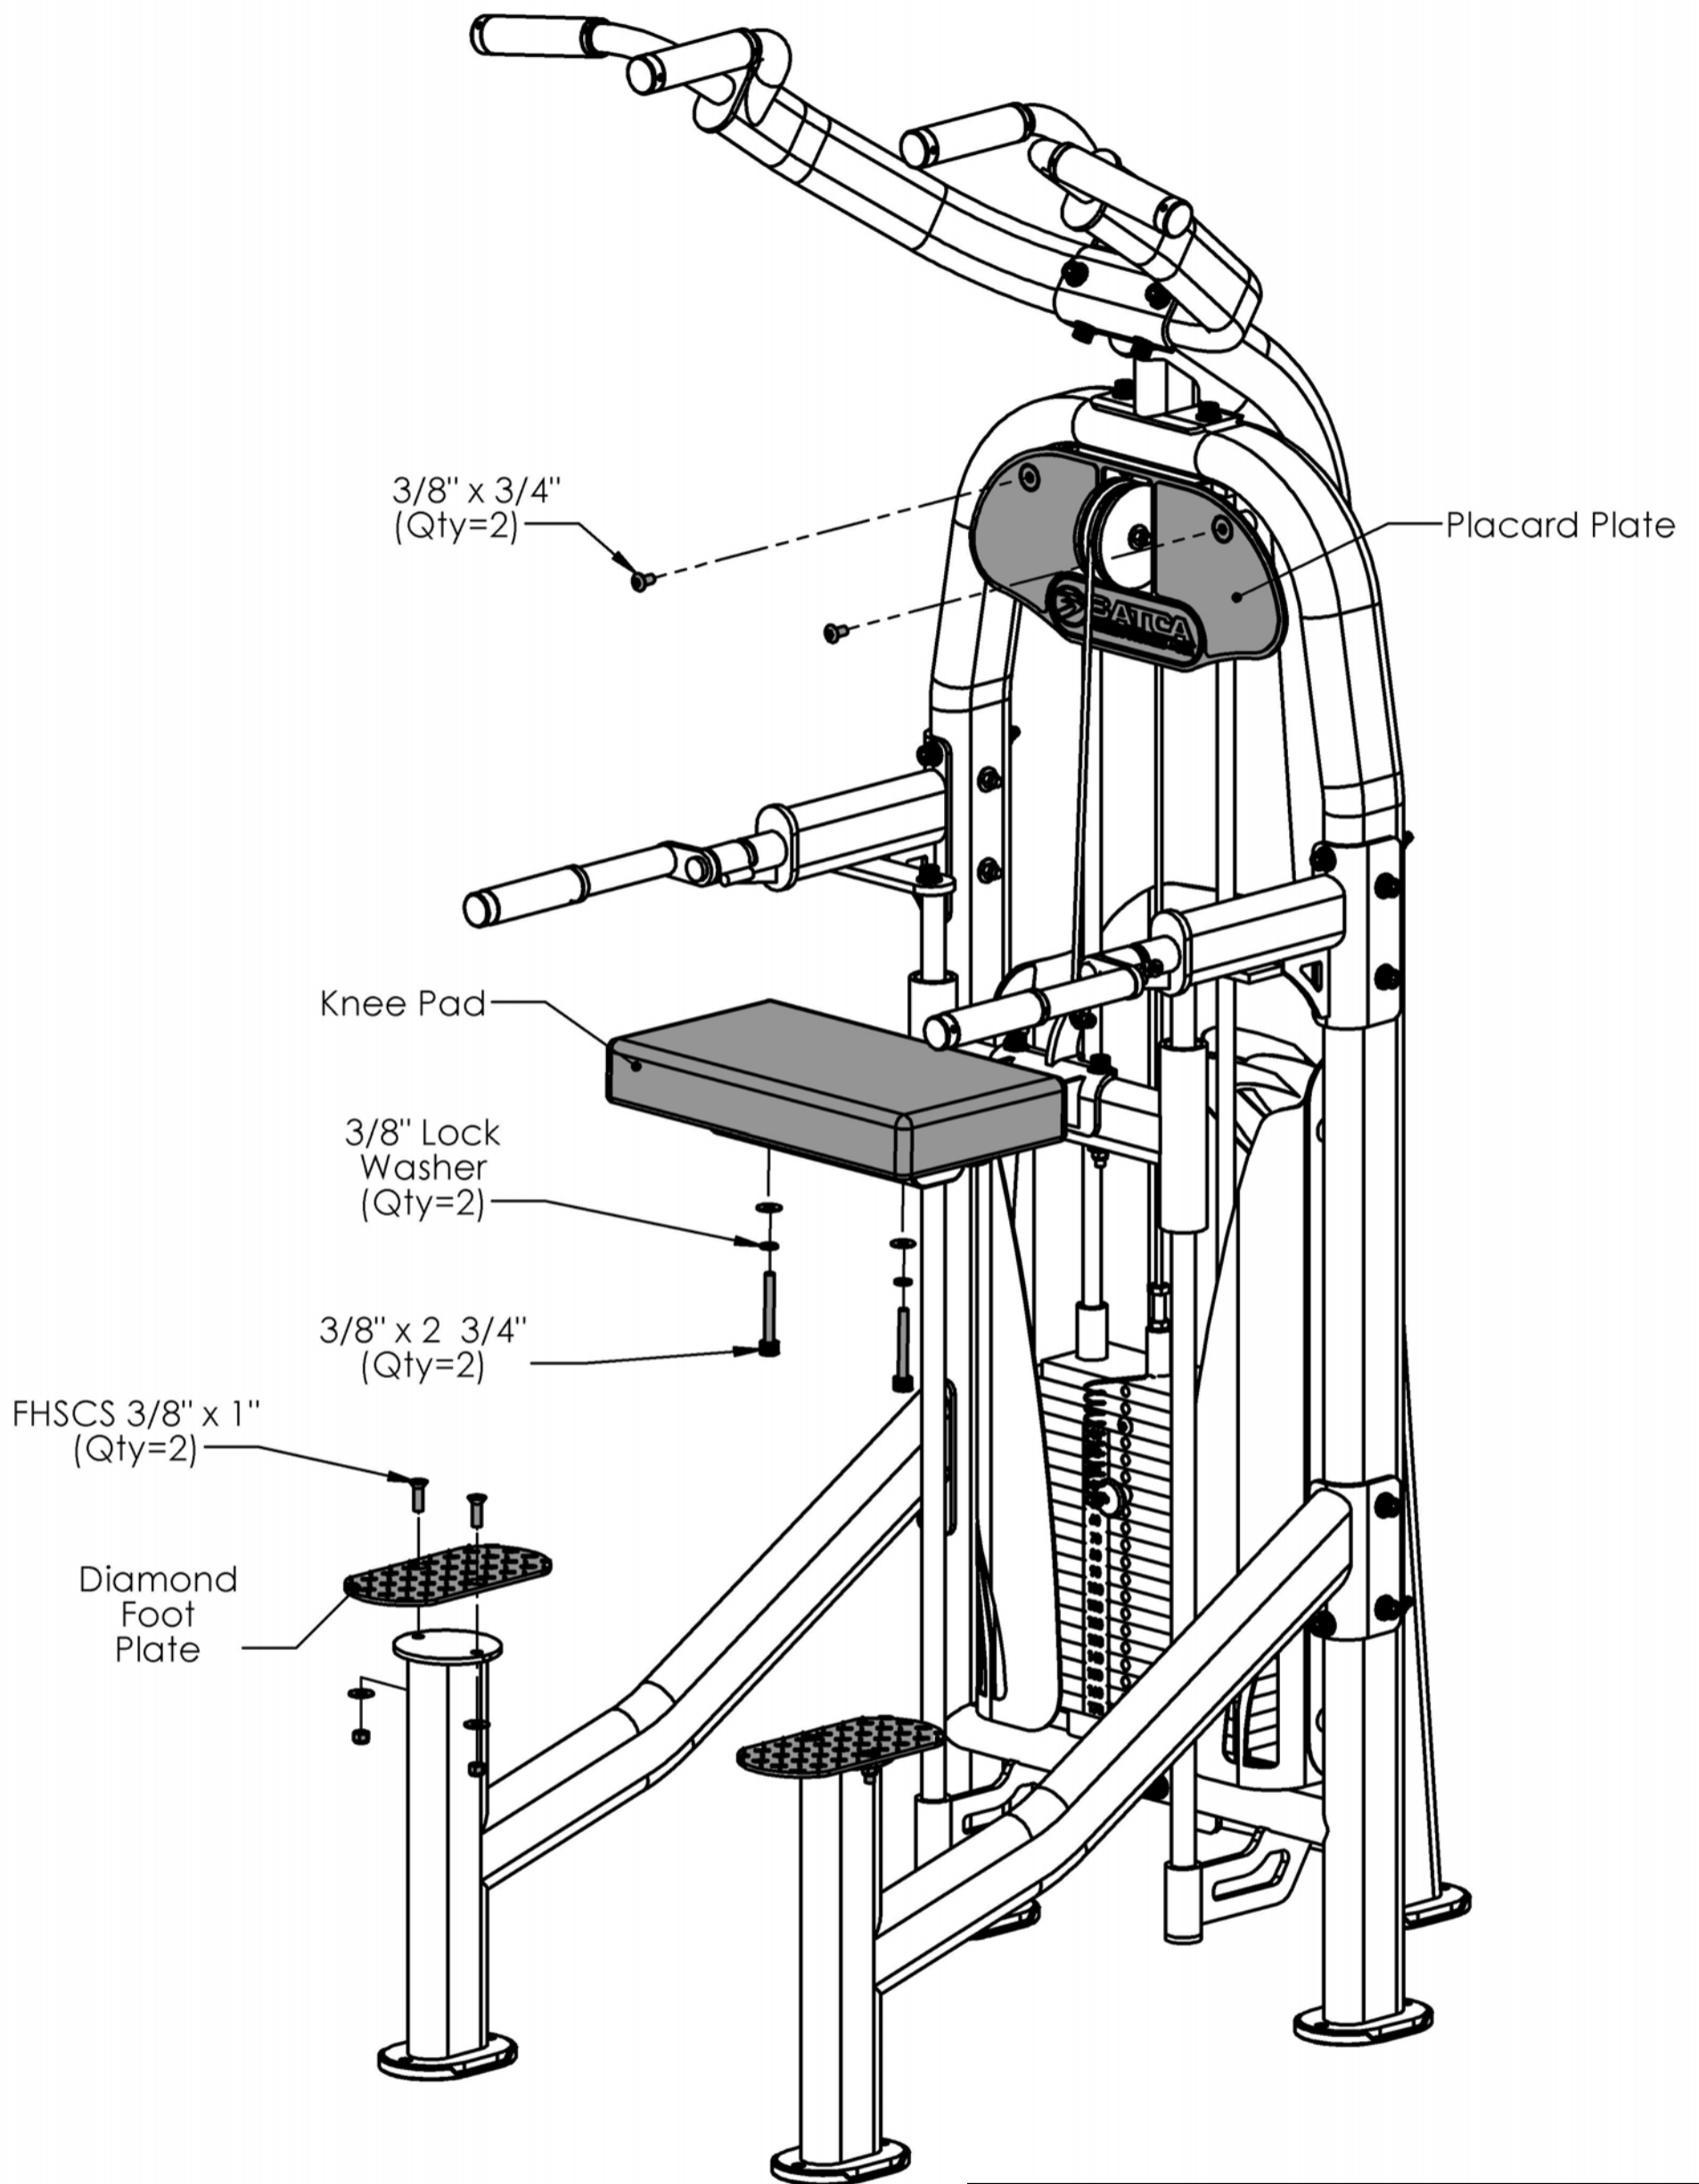


All Flat Washers and Nylocks are 3/8" unless otherwise noted.


Item #	Part #	Description	Qty
23	BFP-51797	Placard Plate	1
24	BFP-51981	Diamond Foot Plate	2
27	BFP-52378	Knee Pad	1
29	BFP-52340	BHSCS 3/8" x 3/4"	2
31	BFH-50144	FHSCS 3/8" x 1"	4
37	BFP-51750	SHCS 3/8" x 2 3/4"	2
45	BFH-50147	3/8" Lock Washer	2
47	BFH-50146	3/8" Flat Washer	6
48	BFH-50157	3/8" Nylock	4

Final Assembly and Troubleshooting

Weight Stack Decals:


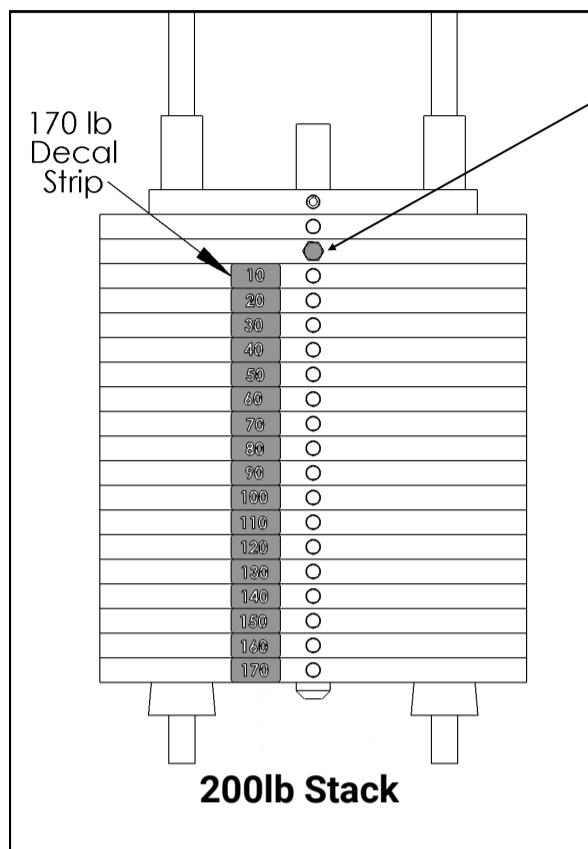


- To counter balance the seat, pin weight stack on the third plate from the top as shown in the figure to the left. Use a BHSCS 3/8" x 4 3/4" bolt.
- Begin numbering the weight stack on the fourth plate down from the top as shown in the figure to the left. Discard the three remaining weight plate decals.

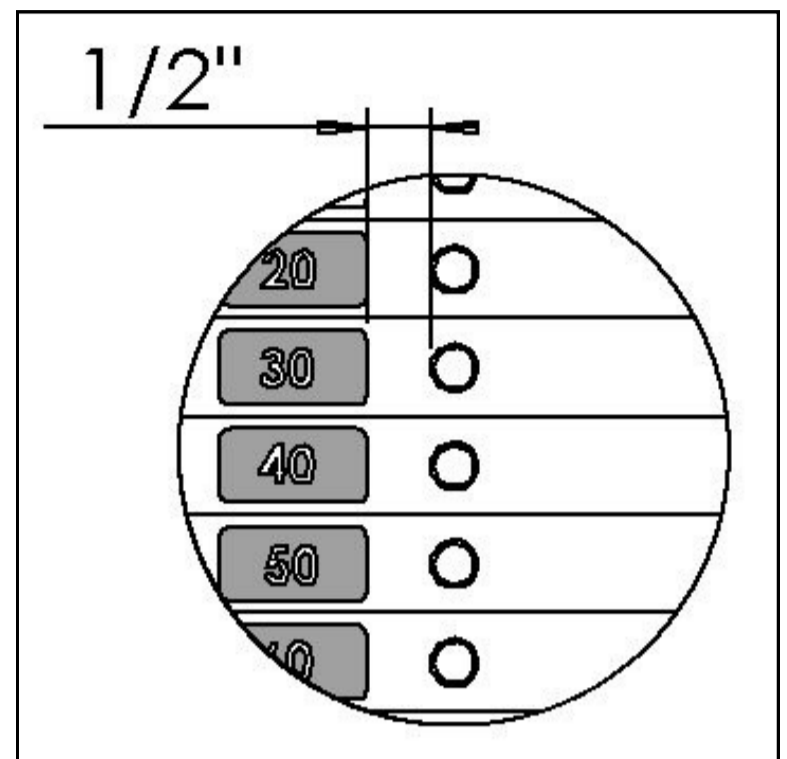

IMPORTANT - Check These Components Before Using

- Each Cable with a threaded bolt on either end **must be threaded at least 1/2"** into its attachment, whether it be a Free Floater, Lockout Free Floater, or the Top Plate of the weight stack. Each must also be secured with a 1/2" Jam Nut to ensure a safe and proper connection.

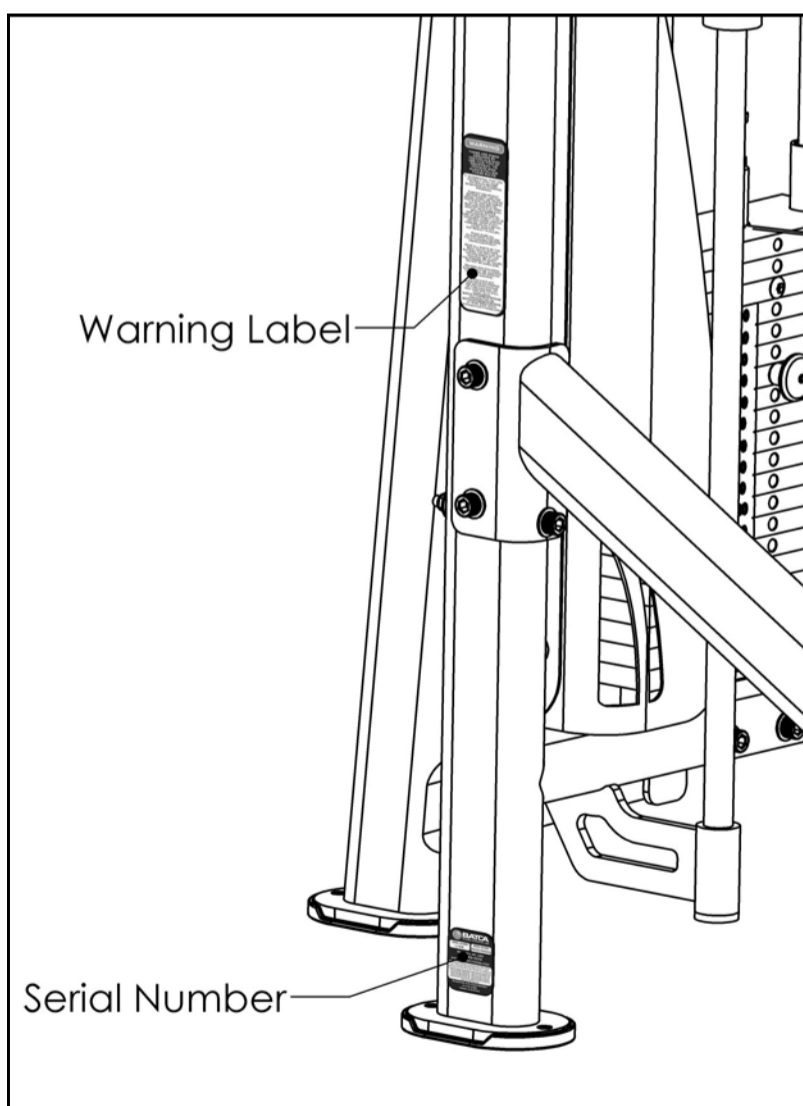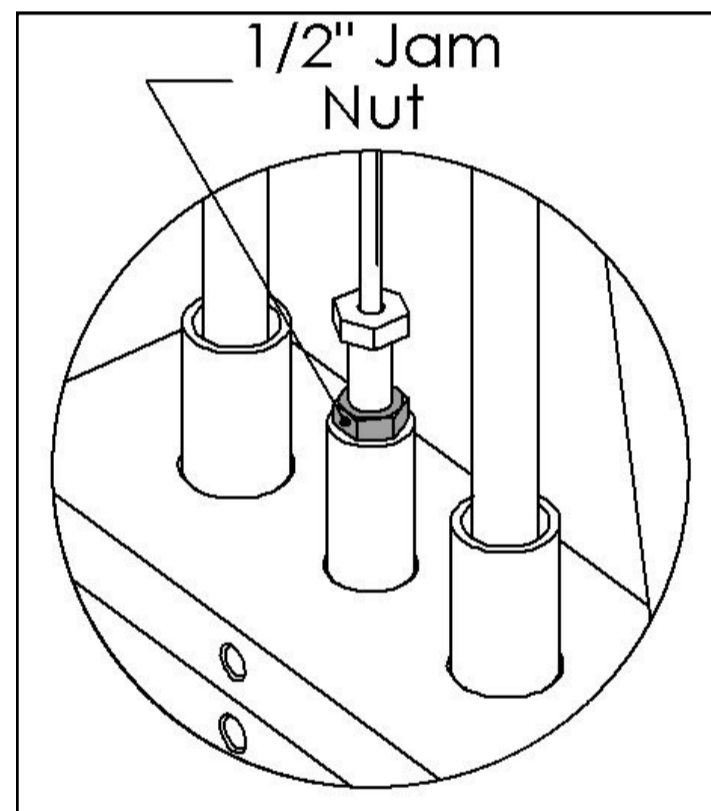

- **Record** your serial number on the front of this manual and keep for your records. The serial number can be found on the side of the cage as seen in the figure to the left.

Guide Rod


- Clean guide rods with a lint-free cloth and apply a thin layer of silicone lubricant (Part # BFH-50262) to each guide rod. This will ensure a glass smooth performance from your weight stack.

Cable Adjustments

- **Adjust** cables to proper tension from any of the locations shown below.

 **Note:** All cables with threaded adjustable ends must have at least 1/2" of the threads threaded in to its counterpart. It is very important that the 1/2" Jam Nut be wrench tightened to the counterpart to ensure that the threaded adjustable end of the cable does not back out of its counterpart.

- **Note:** If the top plate raises off of the second plate in the weight stack, then the cable tension is too tight. You will need to take some of the tension out to lower the Top plate flush with the second plate.

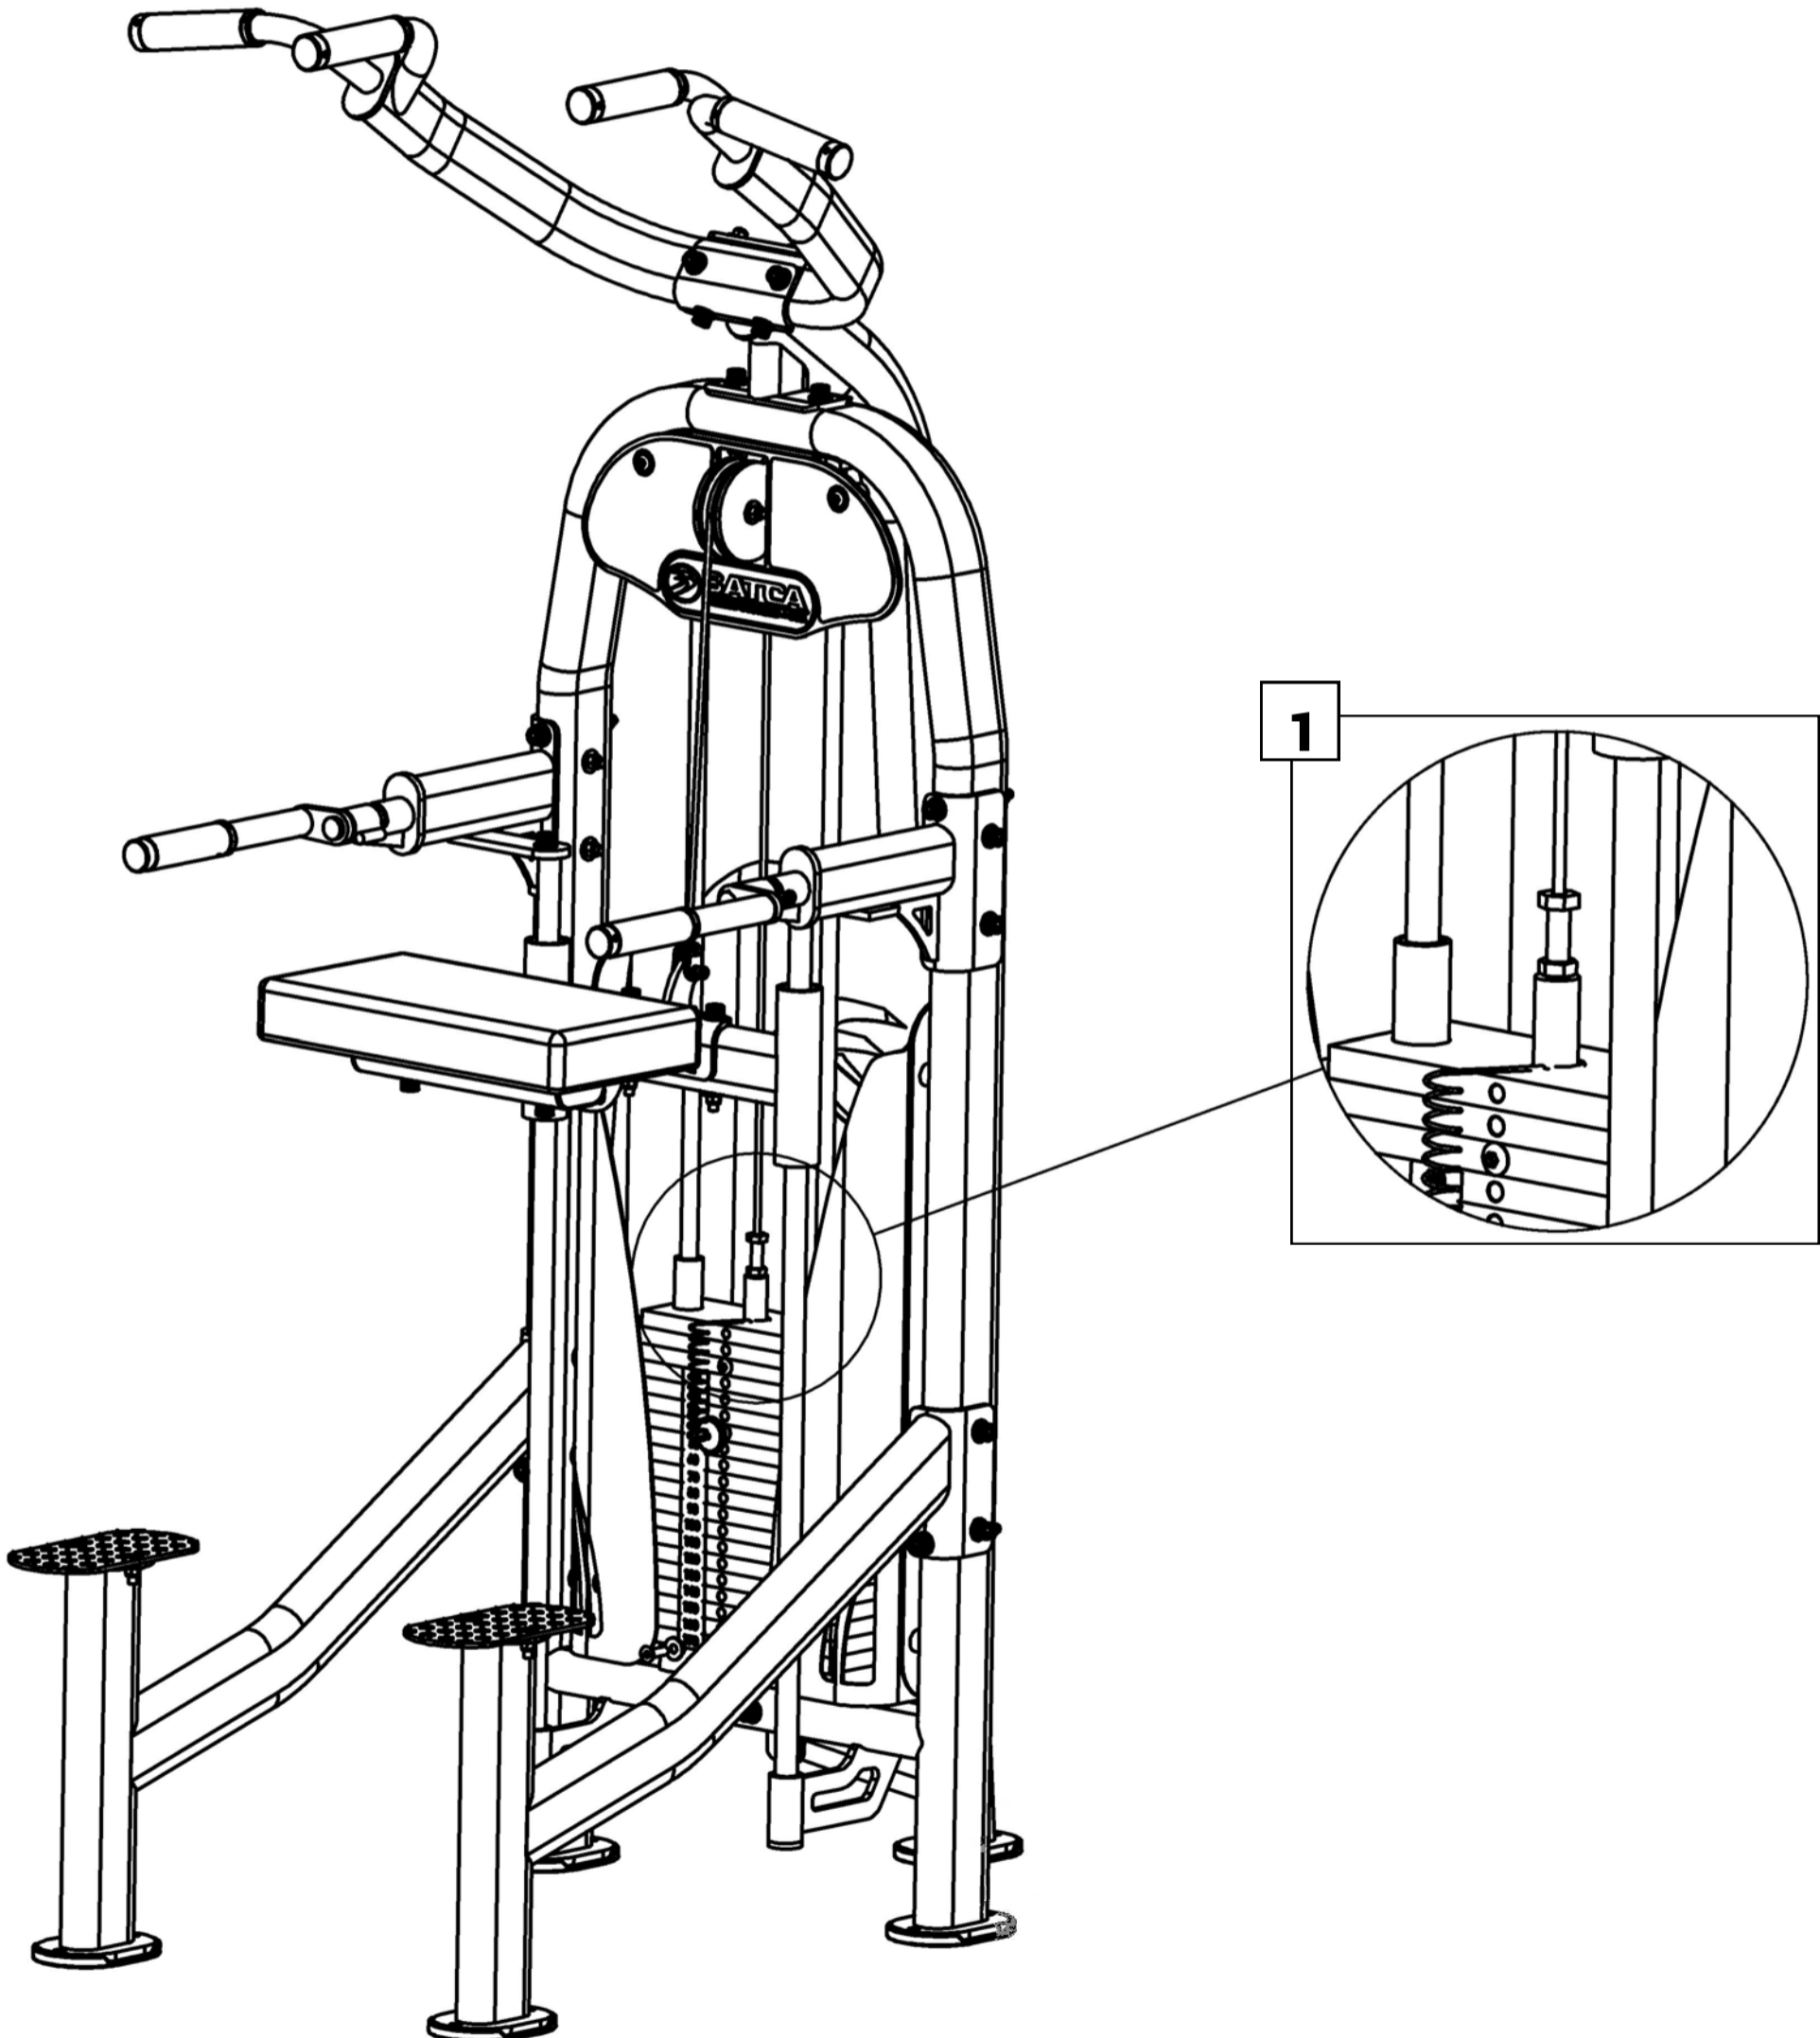

Preventive Maintenance

Batca Fitness Systems strives to give you the very best in quality, performance and safety through carefully engineered designs and excellent workmanship. In order to maintain this high level of quality the preventative maintenance schedule below should be followed.

Clean upholstery, grips, and roller pads with mild soap and water generally after every use. The guide rods, chrome slides and frame should be cleaned with a cotton cloth. Upon cleaning the guide rods, a thin layer of Silicone or Teflon gel should be applied to each rod to ensure a glass smooth performance.

An overall inspection should be done before each workout. If the warning and safety decals are worn or have been removed they should be replaced immediately. The cables and cable systems should be inspected for signs of wear and proper tension. In order to check cables properly you should carefully run the cable through your fingertips, checking for signs of wear, cracks, burs and thinning spots. Replace any part at first signs of wear. Cables should be adjusted for proper tension. See assembly instructions for this detail. All hardware, stops, and adjustments should be checked and tightened as required.

The guide rods on your machine should be cleaned and lubricated regularly. This will ensure a glass smooth performance from your weight stack. A thin layer of either Silicone or Teflon gel should applied to each rod.

Although cables should be inspected daily, it is important that ALL cables be replaced as directed in the schedule below. Please note that at any first sign of wear the cable should be replaced immediately.

If there are any questions concerning maintenance, please contact your local Batca dealer or contact Batca Fitness Systems directly at:

Batca Fitness Systems
(919) 255-1233
www.batcafitness.com

	Daily		Weekly		Monthly		Quarterly		Years	
	Commercial	Home	Commercial	Home	Commercial	Home	Commercial	Home	Commercial	Home
Clean										
Upholstery	X			X						
Hand Grips	X			X						
Roller Pads	X			X						
Guide Rods			X			X				
Chrome Slides			X			X				
Frame			X			X				
Inspect										
Overall	X	X								
Safety Decals	X	X								
Cables	X	X								
Cable Tension			X			X				
Pulleys	X	X								
Hardware	X	X								
Stops	X	X								
Upholstery	X	X								
Hand Grips			X			X				
Frame			X			X				
Bushings	X			X						
Bearings	X			X						
Lubricate										
Guide Rods			X			X				
Bearings							As Needed			1
Replace										
Cables									1	3

Limited Lifetime Warranty

What is covered

For Residential Use:

Batca Fitness Systems warrants all of its products against defects in manufacturing, materials and workmanship under normal use and service for one year from date of purchase including paint, chrome, upholstery and grips. Batca Fitness Systems also warrants all cables, belts, bolts, nuts, caps, plugs, bumpers, washers, levelers, decals, gas springs and other hardware for three years after date of purchase; all moving parts, including pulleys, bushings, bearings and pull pins for five years after date of purchase and warrants the frame and all welded parts for the lifetime of the original purchaser.

For Commercial Use:

Batca Fitness Systems warrants all of its products against defects in manufacturing, materials and workmanship under normal use and service for six months from date of purchase including paint, chrome, upholstery and grips. Batca Fitness Systems also warrants all cables, belts, bolts, nuts, caps, plugs, bumpers, washers, levelers, decals, gas springs and other hardware for one year after date of purchase; all moving parts, including pulleys, bushings, bearings and pull pins for three years after date of purchase and warrants the frame and all welded parts for ten years after date of purchase.

What is not covered

This warranty does not cover damage, which results from shipping, misuse, abuse, neglect, carelessness, modification or alteration, accident, fire, flood, "acts of God" or other contingencies beyond the control of Batca Fitness Systems. This warranty also does not cover deterioration from wear and tear or exposure or any defect, which would not have happened if instructions in the owner's manual had been followed. Improper installation, improper assembly or follow-up maintenance along with installation of parts or accessories not originally intended for products of Batca Fitness Systems are also not covered by this warranty. Only genuine Batca parts should be used for replacement, repair, and maintenance for this warranty to apply.

Defective parts will be repaired or replaced at Batca Fitness Systems option, without parts charge to the purchaser. All returns require a return authorization prior to acceptance of repair work. Batca Fitness Systems reserves the right to make design changes without any prior notification and shall not be responsible for incidental or consequential damages.

The purchaser is responsible for shipping the defective part back to the factory. Repair or replacement is the exclusive and sole remedy of the purchaser. Labor charges associated with parts changeovers are not covered by this warranty. Proof of purchase, serial number, model number and date of purchase will be required along with all pertinent information of the alleged damage.

This warranty applies only to the original purchaser and is not transferable. Claims under this warranty must be made directly to Batca Fitness Systems.



Batca Fitness Systems
1207 N. New Hope Road
Raleigh, NC 27610
(919) 255-1233

www.batcafitness.com

Please keep this for your records.



Scan the QR Code to
register your new
BATCA Product online!

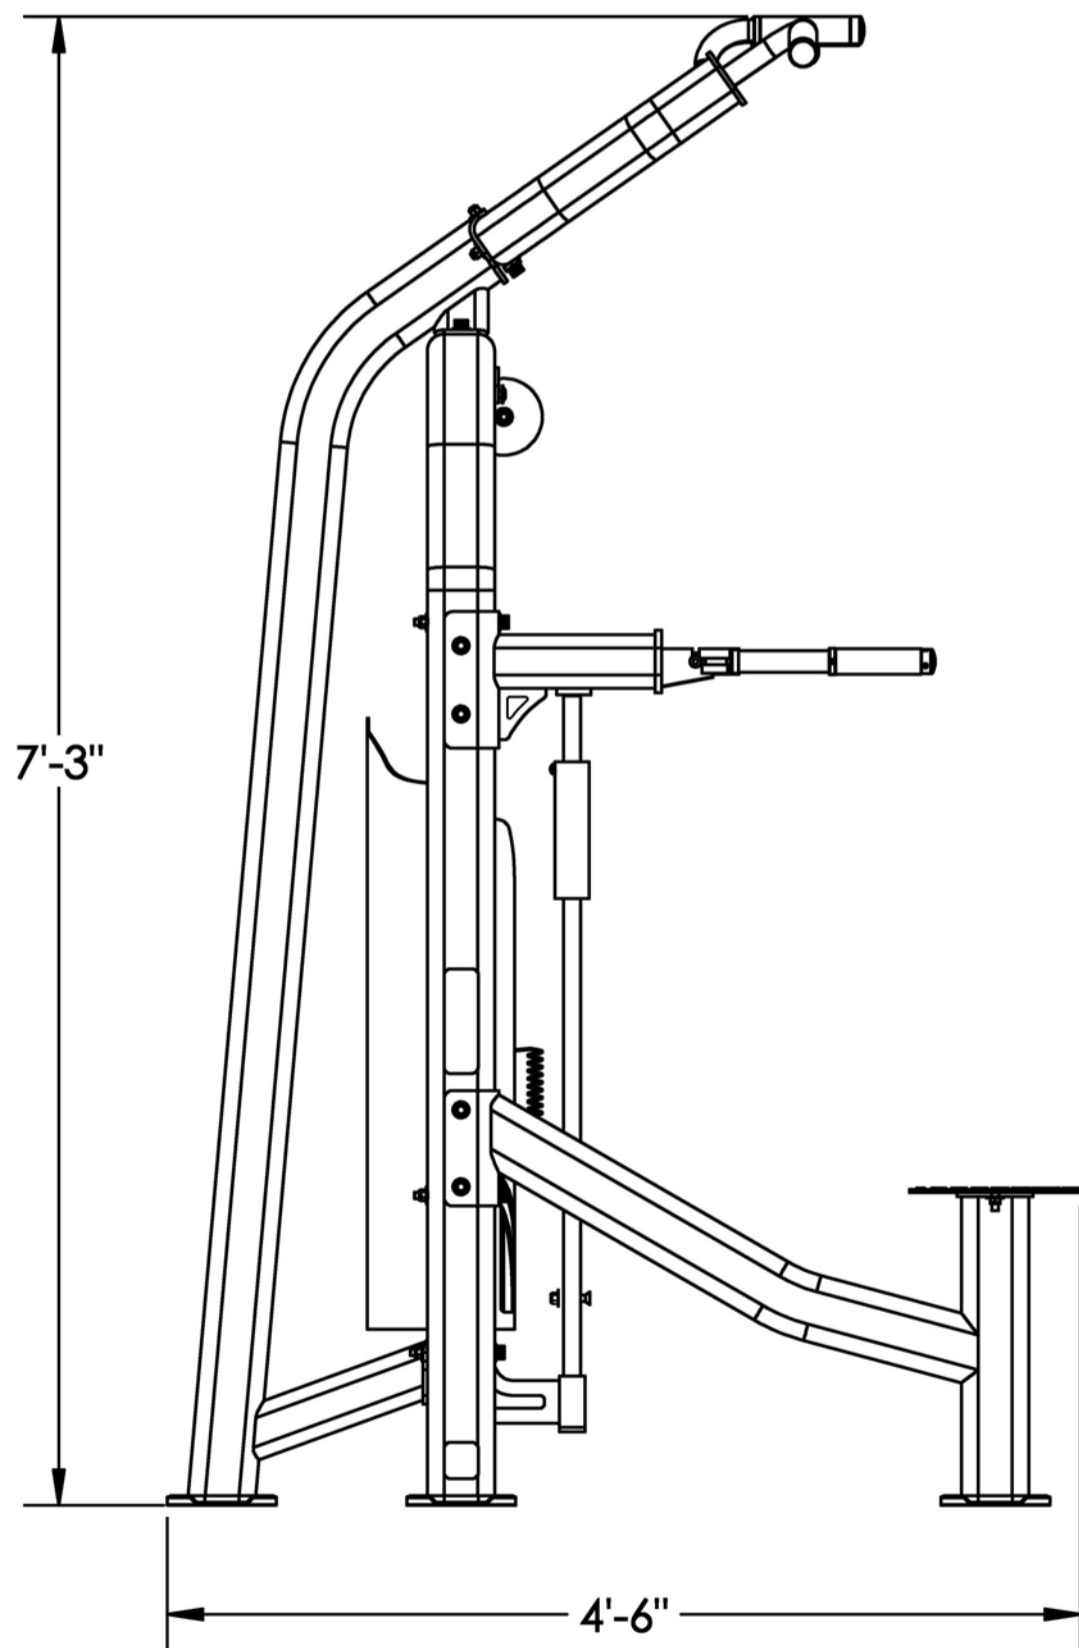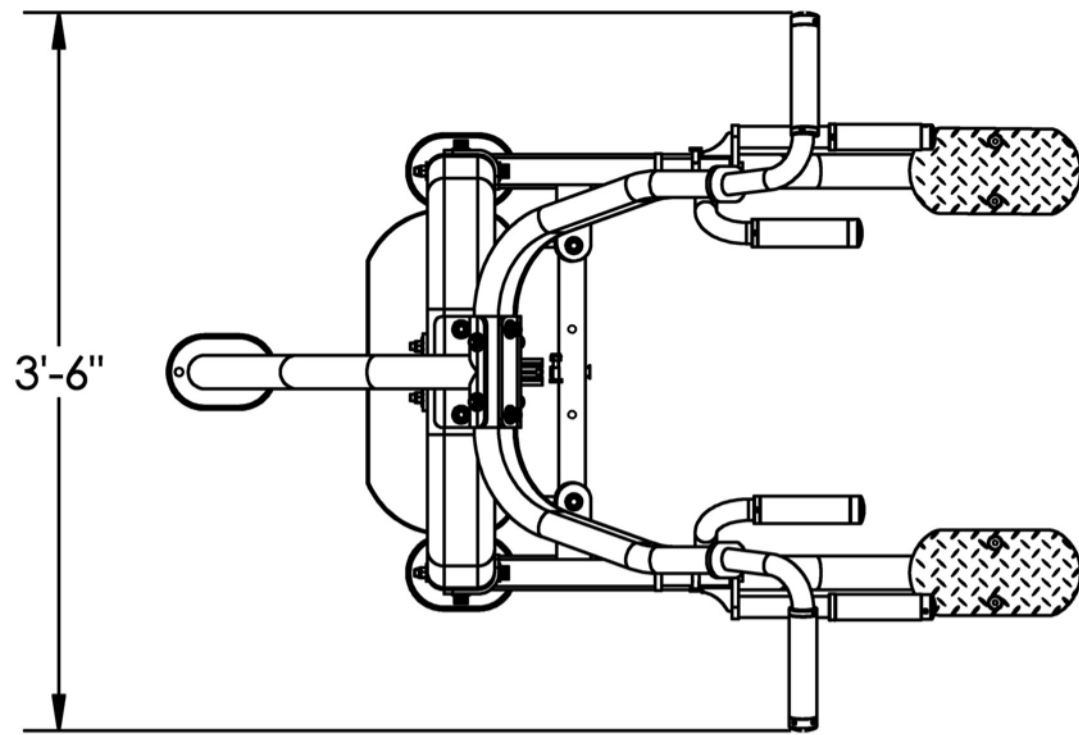

Layout Diagram

The LD-9 has a layout dimension of 3'-6" (width) x 4'-6" (length) x 7'-3" (height). There should be a minimum of 18", preferably 24", of working space around the entire unit.